


# RGB 120

All-in-one chipset  
Full color mixing  
Very reliable product  
3M double-sided tape

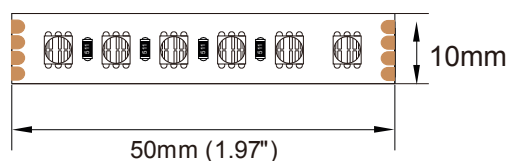

## RGB 19W 120 IP20 . RGB

Model Power LED nr. IP grade RGB+CCT

**Model**  
RGB

**IP grade**  
IP20  
IP67

**Power**  
19W [W/m]

**CCT**  
RGB RGB

**LED Nr.**  
120 [led/m]

### Accessories

Connection kit IP67 (RGB strip) ACC00032  
Set off 5 mounting clips ACC00033

### Features

|                        |           |
|------------------------|-----------|
| LED type               | SMD4040   |
| LED nr.                | 120LEDs/m |
| Standard CCT           | RGB       |
| Other CCT upon request | N.A.      |
| Beam angle             | 120°      |

### Performance

|                        |                    |
|------------------------|--------------------|
| Lumen output (at 85°C) | 825lm/m (251lm/ft) |
| Color rendering index  | N.A.               |
| Efficacy               | 21 – 75lm/W        |

### Electrical and control

|                        |                    |
|------------------------|--------------------|
| Supply type            | Constant voltage   |
| Input voltage          | DC24V              |
| Input current          | 0.8A/m (0.24A/ft)  |
| Max. power consumption | 19.2W/m (5.86W/ft) |
| Dimming                | External           |

### Physical

|                       |              |
|-----------------------|--------------|
| Minimum cut           | 50mm (1.97") |
| Reel length           | 5m (16.40')  |
| Weight                | 0.05kg/m     |
| Operating temperature | -25/+55°C    |
| ESD Protection        | +/- 2000V    |

