


# MUZ 20W

High-precision adjustable beam angle  
Integrated driver  
SDCM<3 CRI>90  
Dimming options available

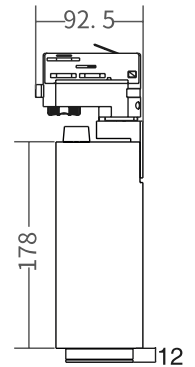

**MUZ.20W** **NN** . **1570** **B** **927**

Model Power Dimming Beam angle Body color CCT

**Model**  
MUZ

**Body color**  
B *Black*  
W *White*

**Power**  
20W [W]

**CCT**  
927 2700K  
930 3000K  
940 4000K

**Dimming**  
NN *none*  
DA *Dali*  
TR *TRIAC*

**Beam angle**  
1570 15÷70 [°]  
1590 15÷90 [°]

## Features

LED type	CREE
Standard CCT	2700K/3000K/4000K
Other CCT upon request	5000K/6000K
Beam angle	15÷70°/15÷90°

## Performance

Max. delivered output	1606 – 1690lm (15÷70°) / 1416 – 1490lm (15÷90°)
Efficacy	80 – 85lm/W (15÷70°) / 71 – 75lm/W (15÷90°)

## Electrical and control

Supply type	Main voltage
Input voltage	AC240V
Max. power consumption	20W
Dimming option	See table of codes

## Physical

Housing material	Aluminium
Optics material	PMMA
Weight	1.2kg
Operating temperature	-25/+55°C

## Accessories

Honeycomb	ACC00534
Barn door	ACC00535
Filter - circular small	ACC00536
Filter - circular big	ACC00537
Filter - square	ACC00538
Filter - rectangular	ACC00539
Filter - wall washing	ACC00540

