


PRE 12

High-end professional down light
Higher lumen output
SDCM<3 CRI>90
Multiple reflector finishing options

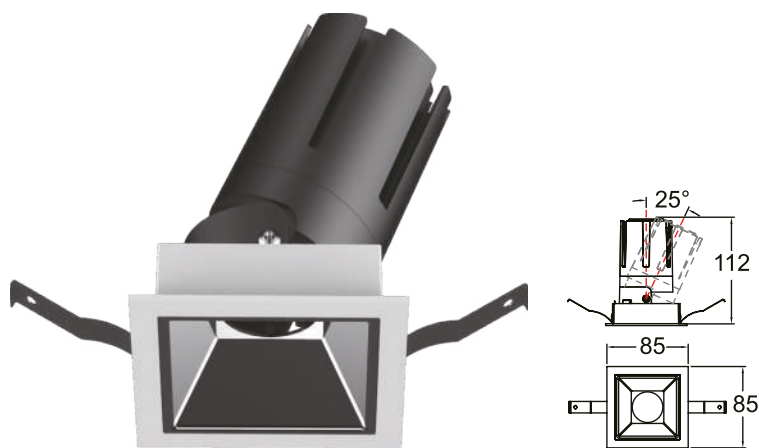

P12 . 12W **015** **B** **IP20** **927**

Model Power Beam angle Body color IP grade CCT

Model
PRE

IP grade
IP20

Power
12W [W]

CCT
927 2700K
930 3000K

Beam angle
015 [°]
024 [°]
035 [°]

940 4000K
950 5000K

Body color
B *Black*
W *White*

Features

LED type	CREE
Color and CCT	2700K/3000K/4000K/5000K
Other colors	Upon request
Beam angle	15°/24°/35°

Performance

Max. delivered output	1320lm
Efficacy	110lm/W

Electrical and control

Supply type	Main voltage (Integral LED driver)
Input voltage	AC240V
Max. power consumption	12W
Dimming	Upon request

Physical

Cut out	75x75mm
Housing material	Aluminium
Optics material	PMMA
Weight	-
Operating temperature	-25/+55°C

Accessories

Matt black reflector	ACC00339
Titanium reflector	ACC00340
Bright silver reflector	ACC00341
Matt silver reflector	ACC00342
Matt white reflector	ACC00343
Honeycomb D40	ACC00344
Smooth filter D40	ACC00345
15x70° Oval filter D40	ACC00346

