

# SUR 24

Ceiling mounted  
SDCM<3 CRI>90

**S24 . 06W 015 B IP20 927**

Model Power Beam angle Body color IP grade CCT

**Model**  
SUR


**IP grade**  
IP20

**Power**  
06W [W]  
09W [W]

**CCT**  
927 2700K  
930 3000K  
940 4000K  
950 5000K

**Beam angle**  
015 [°]  
024 [°]  
035 [°]  
055 [°]

**Body color**  
B Black  
W White

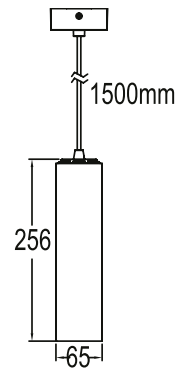

## Features

LED type	CREE
Color and CCT	2700K/3000K/4000K/5000K
Other colors	Upon request
Beam angle	15°/24°/35°/55°

## Performance

Max. delivered output	500lm (6W) / 700lm (9W)
Efficacy	83lm/W (6W) / 78lm/W (9W)

## Electrical and control

Supply type	Main voltage (Integral LED driver)
Input voltage	AC240V
Max. power consumption	6W/9W
Dimming	Upon request

## Physical

Cut out	N.A.
Housing material	Aluminium
Optics material	PMMA
Weight	-
Operating temperature	-25/+55°C

## Accessories

Titanium reflector	ACC00442
Bright silver reflector	ACC00443
Matt silver reflector	ACC00444
Honeycomb D40	ACC00445

