



0612WHT

IP67 protection with full Polyurethane encapsulation. With PC Profile, perfect for underwater applications like swimming pools. Ideal for resorts, seaside parks and luxurious yachts decoration. It is a professional solution for architectural and facade lighting.

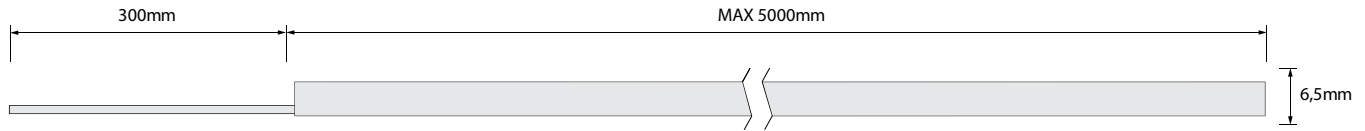

Specifications



Bending



SIDE

Bending radius

30
mm

Features

LED type	Mid-power SMD
LED nr.	120LEDs/m
Standard CCT	2700K/3000K/3500K/4000K/5700K
Other CCT upon request	2200K/2500K
Beam angle	Diffuse

Performance


Lumen output (at 85°C)	480lm/m (8W/m)
Color rendering index	>90
Efficacy	60lm/W

Electrical and control


Supply type	Constant voltage
Input voltage	DC24V
Input current	0.33A/m (8W/m)
Max. power consumption	8W/m
Dimming	External

Physical

Minimum cut	50mm
Max length	5000mm
Bending radius	30mm
Weight	0.12kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V




Accessories



Aluminium profile L=200 cm

Code	ACC00701
Material and color	Aluminium (silver)



Mounting clips

Code	ACC00702
Material and color	Stainless steel (silver)



IP68 2 poles connector kit (male/female)

Code	ACC00712
Diameter	14 mm



Black round PU cable - 2 cores

Code	ACC00716
Wires section	2x0,50 mm ²

How to order

0612WHT 08W XXXX F . 922

Model	Power	Lenght	Cable entry	CCT
-------	-------	--------	-------------	-----

Model	Lenght	CCT	
0612WHT	XXXX [mm]	922	2200K
		925	2500K
08W [W/m]	F Front	927	2700K
		930	3000K
		935	3500K
		940	4000K
		957	5700K