

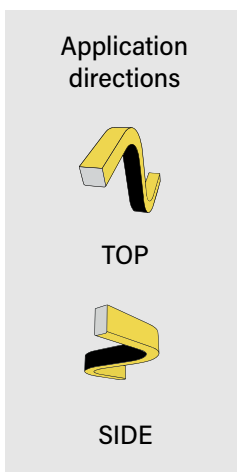




1010RGB

IP68 protection with full Polyurethane encapsulation. With PC Profile, perfect for underwater applications like swimming pools. Ideal for resorts, seaside parks and luxurious yachts decoration. It is a professional solution for architectural and facade lighting.

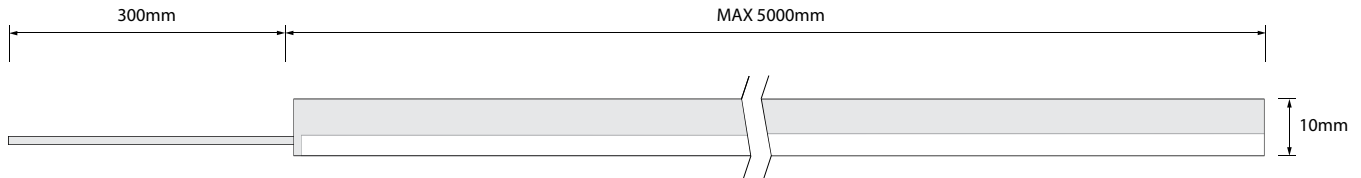

Specifications

Features

LED type	Mid-power SMD
LED nr.	84LEDs/m
Standard CCT	RGB
Other CCT upon request	N.A.
Beam angle	Diffuse

Performance


Lumen output (at 85°C)	390lm/m (full color)
Color rendering index	N.A.
Efficacy	26lm/W (R) / 78lm/W (G) / 15lm/W (B)

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.42A/m (full load)
Max. power consumption	10W/m (full load)
Dimming	External


Physical

Minimum cut	71.5mm
Max length	5000mm
Bending radius	100mm
Weight	0.15kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V




Pictures and sketches have only an information purpose and the products can change form, color and performances without any prior notice.

Accessories




Aluminium profile L=200 cm

Code	ACC00703
Material and color	Aluminium (silver)



Polycarbonate profile L=100 cm

Code	ACC00704
Material and color	Polycarbonate (transparent)



Mounting clips

Code	ACC00705
Material and color	Stainless steel (silver)



IP68 4 poles connector kit (male/female)

Code	ACC00714
Diameter	23 mm



Black round PU cable - 4 cores

Code	ACC00718
Wires section	4x0,5 mm ²

How to order

1010RGB 10W XXXX F .RGB

Model Power Lenght Cable entry CCT

Model
1010RGB **Lenght**
XXXX [mm] **CCT**
RGB RGB

Power
10W [W/m] **Cable entry**
F Front