

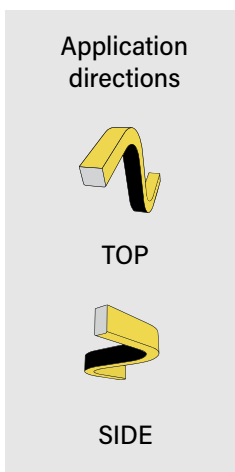




# 1010WHT

IP68 protection with full Polyurethane encapsulation. With PC Profile, perfect for underwater applications like swimming pools. Ideal for resorts, seaside parks and luxurious yachts decoration. It is a professional solution for architectural and facade lighting.

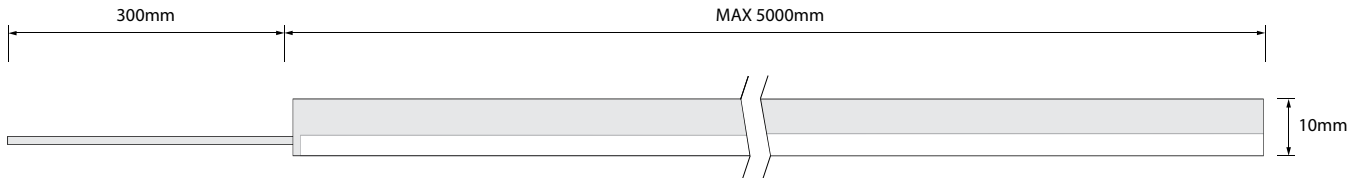

## Specifications

### Features

LED type	Mid-power SMD
LED nr.	144LEDs/m
Standard CCT	2700K/3000K/3500K/4000K/6000K
Other CCT upon request	2200K/2500K
Beam angle	Diffuse

### Performance

Lumen output (at 85°C)	410lm/m (5W/m) / 790lm/m (10W/m)
Color rendering index	>90
Efficacy	82lm/W / 79lm/W

### Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.20A/m (5W/m) / 0.42A/m (10W/m)
Max. power consumption	5W/m / 10W/m
Dimming	External


### Physical

Minimum cut	41.7mm
Max length	5000mm
Bending radius	100mm
Weight	0.15kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V




Pictures and sketches have only an information purpose and the products can change form, color and performances without any prior notice.

## Accessories




### Aluminium profile L=200 cm

Code	ACC00703
Material and color	Aluminium (silver)



### Polycarbonate profile L=100 cm

Code	ACC00704
Material and color	Polycarbonate (transparent)



### Mounting clips

Code	ACC00705
Material and color	Stainless steel (silver)



### IP68 2 poles connector kit (male/female)

Code	ACC00712
Diameter	14 mm



### Black round PU cable - WHT

Code	ACC00716
Wires section	2x0,50 mm <sup>2</sup>

## How to order

**1010WHT 05W XXXX F . 927**

Model	Power	Lenght	Cable entry	CCT
-------	-------	--------	-------------	-----

Model	Lenght	CCT	
1010WHT	XXXX [mm]	927	2700K
		930	3000K
Power	Cable entry	935	3500K
05W [W/m]	F Front	940	4000K
10W [W/m]		960	6000K