


# CCT 120

Wide tuning range  
High CRI  
Very reliable product  
3M double-sided tape  
150 mm feeding wires  
Max lenght from single connection: 5m

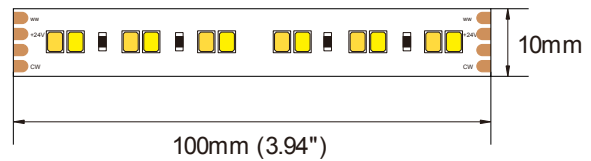

**CCT 14W IP20 . 927960**

Model Power IP grade CCT

Model	CCT	
CCT	927960	2700K+6000K
	927950	2700K+5000K
Power	927940	2700K+4000K
14W [W/m]	930960	3000K+6000K
	940960	4000K+6000K
IP grade		
IP20		
IP65		
IP67		

## Features

LED type	SMD2835
LED nr.	60 + 60LEDs/m
Standard CCT	2700K + 6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

## Performance

Lumen output (at 85°C)	648 + 720lm/m (197 + 220lm/ft)
Color rendering index	>90
Efficacy	90 – 100lm/W

## Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.6A/m (0.18A/ft)
Max. power consumption	14.4W/m (4.39W/ft)
Dimming	External

## Physical

Minimum cut	100mm (3.94")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: [sales@elinca.it](mailto:sales@elinca.it)