


CCT 240

Wide tuning range
High CRI
Very reliable product
3M double-sided tape
150 mm feeding wires
Max lenght from single connection: 2.5m

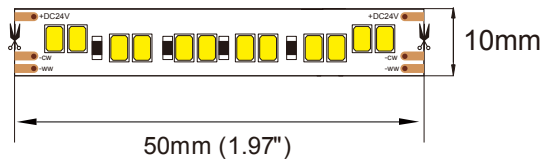

CCT 24W IP20 . 927960

Model Power IP grade CCT

Model	CCT	
CCT	927960	2700K+6000K
	927950	2700K+5000K
Power	927940	2700K+4000K
24W [W/m]	930960	3000K+6000K
	940960	4000K+6000K
IP grade		
IP20		
IP65		
IP67		

Features

LED type	SMD2835
LED nr.	120 + 120LEDs/m
Standard CCT	2700K + 6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

Performance

Lumen output (at 85°C)	1080 + 1200lm/m (329 + 366lm/ft)
Color rendering index	>90
Efficacy	90 – 100lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	1A/m (0.3A/ft)
Max. power consumption	24W/m (7.3W/ft)
Dimming	External

Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it