


# PRO 140

High performance product  
 Full range of colors from 1800K to 6500K  
 SDCM<2 CRI>95  
 Thermal conductive double-sided tape  
 150 mm feeding wires  
 Max lenght from single connection: 5m

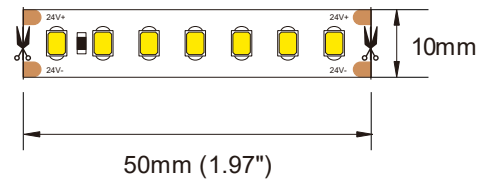

**PRO 12W 140 IP20 . 927**

Model Power LED nr. IP grade CCT

<b>Model</b>	<b>CCT</b>	
PRO	927	2700K
	930	3000K
<b>Power</b>	940	4000K
12W [W/m]	950	5000K
	960	6000K
<b>LED Nr.</b>		
140 [led/m]		
<b>IP grade</b>		
IP20		

## Features

LED type	SMD2835
LED nr.	140LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

## Performance


Lumen output (at 85°C)	1080 – 1260lm/m (329 – 384lm/ft)
Color rendering index	>95
Efficacy	90 – 105lm/W

## Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.5A/m (0.15A/ft)
Max. power consumption	12W/m (3.7W/ft)
Dimming	External

## Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it