


# PRO 160

High performance product  
Full range of colors from 1800K to 6500K  
SDCM<2 CRI>95  
Thermal conductive double-sided tape  
150 mm feeding wires  
Max lenght from single connection: 5m

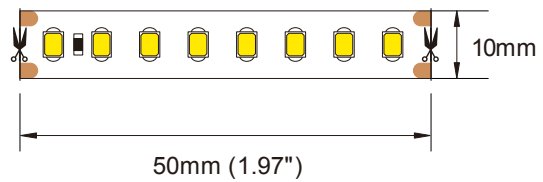

**PRO 14W 160 IP20 . 927**

Model Power LED nr. IP grade CCT

Model	CCT
PRO	927 2700K
	930 3000K
Power	940 4000K
14W [W/m]	950 5000K
	960 6000K
LED Nr.	
160 [led/m]	
IP grade	
IP20	

## Features

LED type	SDM2835
LED nr.	160LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

## Performance

Lumen output (at 85°C)	1602 – 1805lm/m (488 – 550lm/ft)
Color rendering index	>95
Efficacy	111 – 125lm/W

## Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.6A/m (0.18A/ft)
Max. power consumption	14.4W/m (4.39W/ft)
Dimming	External

## Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: [sales@elinca.it](mailto:sales@elinca.it)