


# PRO 240

High performance product  
 Full range of colors from 1800K to 6500K  
 SDCM<2 CRI>95  
 Thermal conductive double-sided tape  
 150 mm feeding wires  
 Max lenght from single connection: 2.5m

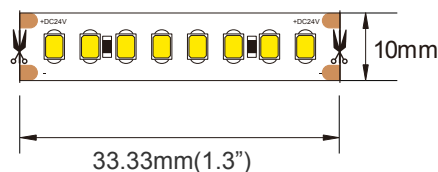

**PRO 21W 240 IP20 . 927**

Model Power LED nr. IP grade CCT

Model	CCT	
PRO	927	2700K
	930	3000K
Power	940	4000K
21W [W/m]	950	5000K
	960	6000K
LED Nr.	240 [led/m]	
IP grade	IP20	

## Features

LED type	SMD2835
LED nr.	240LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

## Performance


Lumen output (at 85°C)	2295 – 2592lm/m (699 – 790lm/ft)
Color rendering index	>95
Efficacy	106 – 120lm/W

## Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.9A/m (0.27A/ft)
Max. power consumption	21.6W/m (6.58W/ft)
Dimming	External

## Physical

Minimum cut	33.33mm (1.3")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: [sales@elinca.it](mailto:sales@elinca.it)