


# RGB 060

All-in-one chipset  
Full color mixing  
Very reliable product  
3M double-sided tape  
150 mm feeding wires  
Max lenght from single connection: 5m

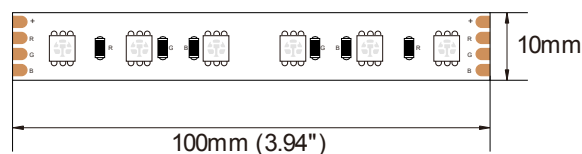

**RGB 14W** **060** **IP20** . **RGB**

Model Power LED nr. IP grade RGB+CCT

## Model

RGB

## IP grade

IP20

IP65

IP67

## Power

14W [W/m]

## CCT

RGB RGB

## LED Nr.

060 [led/m]

## Features

LED type	SMD5050
LED nr.	60LEDs/m
Standard CCT	RGB
Other CCT upon request	N.A.
Beam angle	120°

## Performance


Lumen output (at 85°C)	619lm/m (188lm/ft)
Color rendering index	N.A.
Efficacy	21 – 75lm/W

## Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.6A/m (0.18A/ft)
Max. power consumption	14.4W/m (4.39W/ft)
Dimming	External

## Physical

Minimum cut	100mm (3.94")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: [sales@elinca.it](mailto:sales@elinca.it)