


# RGB 120

All-in-one chipset  
 Full color mixing  
 Very reliable product  
 3M double-sided tape  
 150 mm feeding wires  
 Max lenght from single connection: 5m

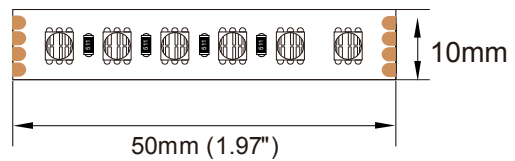

**RGB 19W 120 IP20 . RGB**

Model Power LED nr. IP grade RGB+CCT

**Model**  
RGB

**IP grade**  
IP20  
IP67

**Power**  
19W [W/m]

**CCT**  
RGB RGB

**LED Nr.**  
120 [led/m]

## Features

LED type	SMD4040
LED nr.	120LEDs/m
Standard CCT	RGB
Other CCT upon request	N.A.
Beam angle	120°

## Performance


Lumen output (at 85°C)	825lm/m (251lm/ft)
Color rendering index	N.A.
Efficacy	21 – 75lm/W

## Electrical and control

Supply type	Costant voltage
Input voltage	DC24V
Input current	0.8A/m (0.24A/ft)
Max. power consumption	19.2W/m (5.86W/ft)
Dimming	External

## Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it