



# RGBW 060

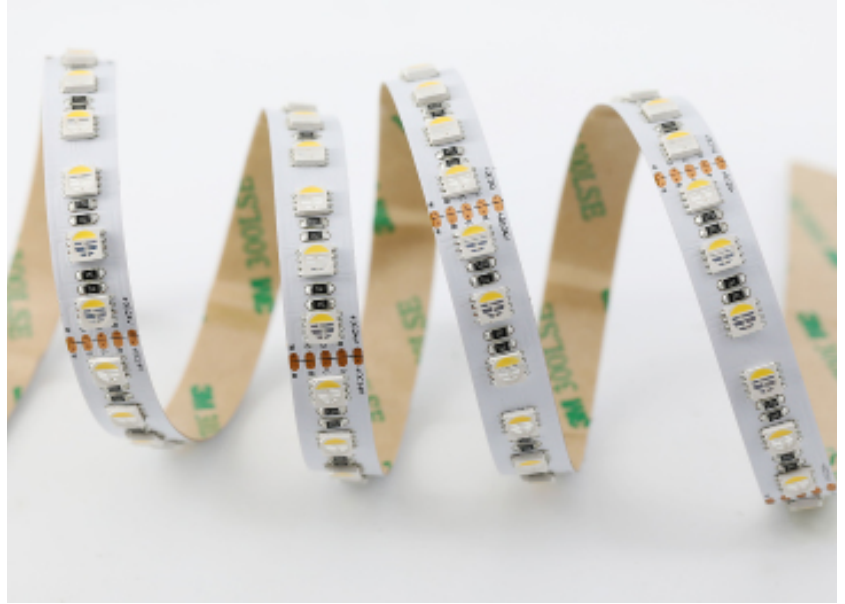

All-in-one chipset  
Full color mixing  
Very reliable product  
3M double-sided tape  
150 mm feeding wires  
Max lenght from single connection: 5m

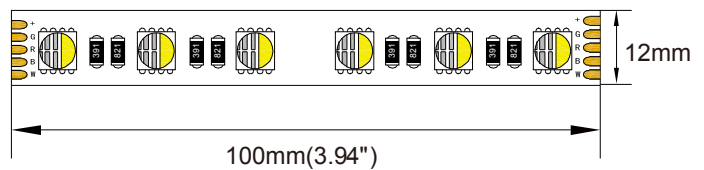

**RGBW 14W 060 IP20 . CC3**

Model Power LED nr. IP grade RGB+CCT

<b>Model</b>	<b>CCT</b>	
RGBW	CC3	RGB+3000K
	CC4	RGB+4000K
	CC6	RGB+6000K
<b>Power</b>		
14W [W/m]		
<b>LED Nr.</b>		
060 [led/m]		
<b>IP grade</b>		
IP20		
IP65		
IP67		

## Features

LED type	SMD5050
LED nr.	60LEDs/m
Standard CCT	RGB+3000K/4000K/6000K
Other CCT upon request	N.A.
Beam angle	120°

## Performance


Lumen output (at 85°C)	RGB 545lm/m - White 370lm/m
Color rendering index	N.A.
Efficacy	34 – 102lm/W

## Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.6A/m (0.18A/ft)
Max. power consumption	14.4W/m (4.39W/ft)
Dimming	External

## Physical

Minimum cut	100mm (3.94")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it