


# RGBW 084

All-in-one chipset  
Full color mixing  
Very reliable product  
3M double-sided tape  
150 mm feeding wires  
Max lenght from single connection: 2.5m

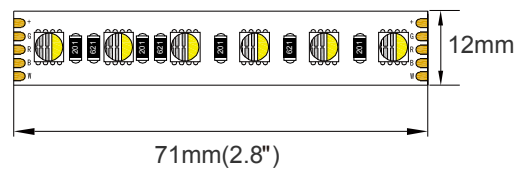

**RGBW 19W 084 IP20 . CC3**

Model Power LED nr. IP grade RGB+CCT

**Model**  
RGBW

**CCT**  
CC3 *RGB+3000K*  
CC4 *RGB+4000K*  
CC6 *RGB+6000K*

**Power**  
19W [W/m]

**LED Nr.**  
084 [led/m]

**IP grade**  
IP20  
IP67

## Features

LED type	SMD5050
LED nr.	84LEDs/m
Standard CCT	RGB+3000K/4000K/6000K
Other CCT upon request	N.A.
Beam angle	120°

## Performance


Lumen output (at 85°C)	RGB 576lm/m - White 392lm/m
Color rendering index	N.A.
Efficacy	18 – 81lm/W

## Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.8A/m (0.24A/ft)
Max. power consumption	19.2W/m (5.9W/ft)
Dimming	External

## Physical

Minimum cut	71mm (2.8")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: [sales@elinca.it](mailto:sales@elinca.it)