


# SLI 140

Ultra-slim design  
High led density  
Very reliable product  
3M double-sided tape  
150 mm feeding wires  
Max lenght from single connection: 5m

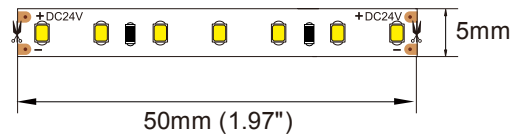

**SLI 12W 140 IP20 . 927**

Model Power LED nr. IP grade CCT

Model	CCT	
SLI	927	2700K
	930	3000K
Power	940	4000K
12W [W/m]	950	5000K
	960	6000K
LED Nr.	140 [led/m]	
IP grade	IP20	
	IP65	
	IP67	

## Features

LED type	SMD2835
LED nr.	140LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

## Performance

Lumen output (at 85°C)	1200 – 1320lm/m (365 – 402lm/ft)
Color rendering index	>90
Efficacy	100 – 110lm/W

## Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.5A/m (0.15A/ft)
Max. power consumption	12W/m (3.65W/ft)
Dimming	External

## Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it