


SLI 204

Ultra-slim design
High led density
Very reliable product
3M double-sided tape
150 mm feeding wires
Max lenght from single connection: 5m

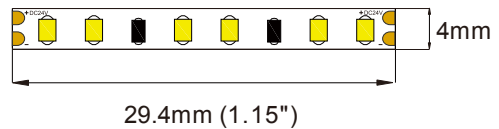

SLI 14W 204 IP20 . 927

Model Power LED nr. IP grade CCT

Model	CCT	
SLI	927	2700K
	930	3000K
Power	940	4000K
14W [W/m]	950	5000K
	960	6000K

LED Nr.
204 [led/m]

IP grade
IP20
IP65
IP67

Features

LED type	SMD2216
LED nr.	204LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

Performance

Lumen output (at 85°C)	1410 – 1515lm/m (429 – 461lm/ft)
Color rendering index	>90
Efficacy	95 – 100lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.6A/m (0.18A/ft)
Max. power consumption	14.4W/m (4.4W/ft)
Dimming	External

Physical

Minimum cut	29.4mm (1.15")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it