


STA 060

Very reliable product
 Full range of colors from 1800K to 6500K
 SDCM<3 CRI>90
 3M double-sided tape
 150 mm feeding wires
 Max lenght from single connection: 10m

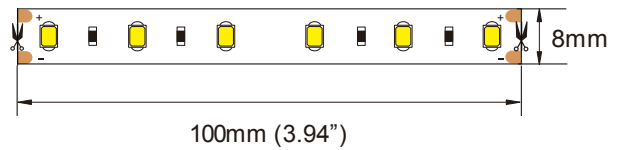

STA 04W 060 IP20 . 927

Model Power LED nr. IP grade CCT

Model	CCT	
STA	927	2700K
	930	3000K
Power	940	4000K
04W [W/m]	950	5000K
	960	6000K
LED Nr.	060 [led/m]	
IP grade	IP20	
	IP65	
	IP67	

Features

LED type	SMD3528
LED nr.	60LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

Performance

Lumen output (at 85°C)	485 – 550lm/m (148 – 167lm/ft)
Color rendering index	>90
Efficacy	101 – 115lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.2A/m (0.6A/ft)
Max. power consumption	4.8W/m (1.46W/ft)
Dimming	External

Physical

Minimum cut	100mm (3.94")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it