


# STA 070

Very reliable product  
 Full range of colors from 1800K to 6500K  
 SDCM<3 CRI>90  
 3M double-sided tape  
 150 mm feeding wires  
 Max lenght from single connection: 10m

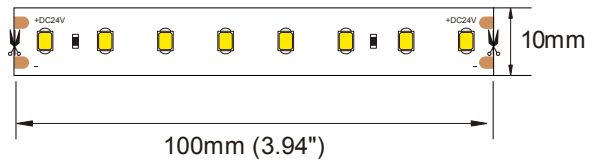

**STA 06W 070 IP20 . 927**

Model Power LED nr. IP grade CCT

Model	CCT
STA	927 2700K
	930 3000K
Power	940 4000K
06W [W/m]	950 5000K
	960 6000K
LED Nr.	070 [led/m]

IP grade
IP20
IP65
IP67

## Features

LED type	SMD2835
LED nr.	70LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

## Performance

Lumen output (at 85°C)	622 – 698lm/m (189 – 213lm/ft)
Color rendering index	>90
Efficacy	104 – 116lm/W

## Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.25A/m (0.08A/ft)
Max. power consumption	6W/m (1.8W/ft)
Dimming	External

## Physical

Minimum cut	100mm (3.94")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it