


STA 126

Very reliable product
 Full range of colors from 1800K to 6500K
 SDCM<3 CRI>90
 3M double-sided tape
 150 mm feeding wires
 Max lenght from single connection: 5m

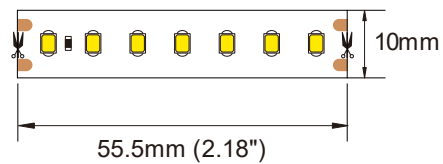

STA 10W 126 IP20 . 927

Model Power LED nr. IP grade CCT

Model	CCT	
STA	927	2700K
	930	3000K
Power	940	4000K
10W [W/m]	950	5000K
	960	6000K
LED Nr.	126 [led/m]	
IP grade	IP20	
	IP65	
	IP67	

Features

LED type	SMD2835
LED nr.	126LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

Performance

Lumen output (at 85°C)	1180 – 1325lm/m (360 – 404lm/ft)
Color rendering index	>90
Efficacy	118 – 132lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.42A/m (0.13A/ft)
Max. power consumption	10W/m (3W/ft)
Dimming	External

Physical

Minimum cut	55.5mm (2.18")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it