


STA 160

Very reliable product
Full range of colors from 1800K to 6500K
SDCM<3 CRI>90
3M double-sided tape
150 mm feeding wires
Max lenght from single connection: 5m

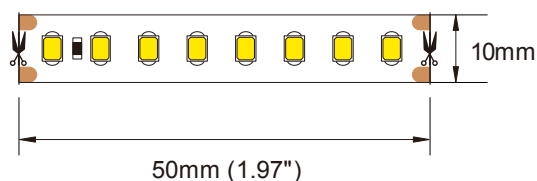

STA 14W 160 IP20 . 927

Model Power LED nr. IP grade CCT

Model	CCT	
STA	927	2700K
	930	3000K
	940	4000K
Power	14W [W/m]	950 5000K
		960 6000K

LED Nr.
160 [led/m]

IP grade
IP20
IP65
IP67

Features

LED type	SMD2835
LED nr.	160LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

Performance


Lumen output (at 85°C)	1442 — 1696lm/m (439— 517lm/ft)
Color rendering index	>90
Efficacy	100 — 118lm/W

Electrical and control

Supply type	Costant voltage
Input voltage	DC24V
Input current	0.6A/m (0.18A/ft)
Max. power consumption	14.4W/m (4.39W/ft)
Dimming	External

Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible,
please check with our technical office at the email address: sales@elinca.it