


STA 210

Very reliable product
 Full range of colors from 1800K to 6500K
 SDCM<3 CRI>90
 3M double-sided tape
 150 mm feeding wires
 Max lenght from single connection: 2.5m

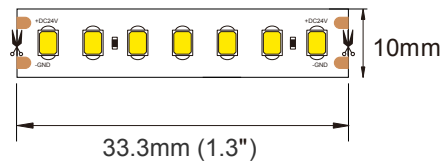

STA 19W 210 IP20 . 927

Model Power LED nr. IP grade CCT

Model	CCT
STA	927 2700K
	930 3000K
Power	940 4000K
19W [W/m]	950 5000K
	960 6000K
LED Nr.	210 [led/m]
IP grade	IP20
	IP65
	IP67

Features

LED type	SMD2835
LED nr.	210LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

Performance

Lumen output (at 85°C)	1950 – 2200lm/m (594 – 670lm/ft)
Color rendering index	>90
Efficacy	101– 115lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.8A/m (0.24A/ft)
Max. power consumption	19.2W/m (5.85W/ft)
Dimming	External

Physical

Minimum cut	33.3mm (1.3")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it