


# WAP 0410

High quality silicone extrusion  
Fully waterproof  
Available in 5m and 10m reel (upon request)  
Cuttable on site  
300 mm feeding wires  
Max lenght from single connection: 10m

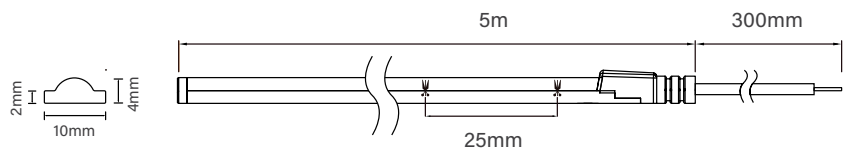

## WAP 10W 0410 IP65 . 927

Model Power Dimensions IP grade CCT

Model	CCT
WAP	927 2700K
	930 3000K
Power	940 4000K
10W [W/m]	950 5000K
	960 6000K

**Dimensions**  
4x10mm

**IP grade**  
IP65

### Accessories

Front feeding	ACC00008
End cap	ACC00009
Plastic clip	ACC00010
Aluminium mounting profile L=1m	ACC00011

### Features

LED type	SMD2835
LED nr.	280LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/2500K/6500K
Beam angle	120°

### Performance


Lumen output (at 85°C)	600 – 700lm/m (195 – 230lm/ft)
Color rendering index	>90
Efficacy	60 – 70lm/W

### Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.4A/m (0.12A/ft)
Max. power consumption	10W/m (3W/ft)
Dimming	External

### Physical

Minimum cut	25mm (1")
Reel length	5m (16.40')
Weight	0.12kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: [sales@elinca.it](mailto:sales@elinca.it)