


WAP 0612

High quality silicone extrusion
Fully waterproof
Available in 5m and 10m reel (upon request)
Cuttable on site
300 mm feeding wires
Max lenght from single connection: 10m

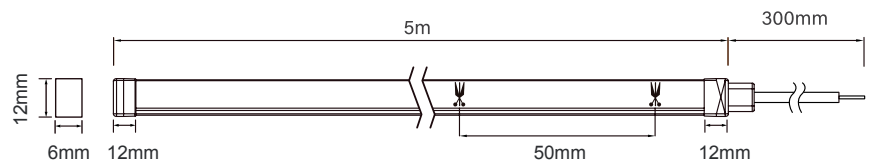

WAP 10W 0612 IP65 . 927

Model Power Dimensions IP grade CCT

Model	CCT	
WAP	927	2700K
	930	3000K
Power	940	4000K
10W [W/m]	950	5000K
	960	6000K

Dimensions
6x12mm

IP grade
IP65

Accessories

Front cap	ACC00012
Side entry cap	ACC00013
End cap	ACC00014
Aluminium clip	ACC00015
Aluminium mounting profile L=1m	ACC00016

Features

LED type	SMD2835
LED nr.	120LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/2500K/6500K
Beam angle	120°

Performance



Lumen output (at 85°C)	246 – 360lm/m (75 – 110lm/ft)
Color rendering index	>90
Efficacy	41 – 60lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.4A/m (0.12A/ft)
Max. power consumption	10W/m (3W/ft)
Dimming	External

Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.12kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it