
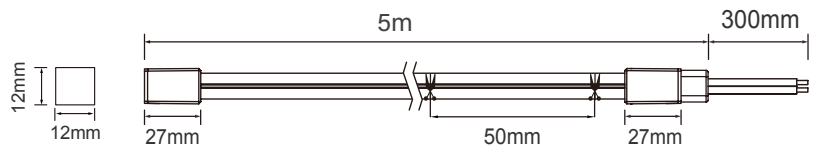


WAP 1212

High quality silicone extrusion
Fully waterproof
Available in 5m and 10m reel (upon request)
Cuttable on site
300 mm feeding wires
Max lenght from single connection: 10m

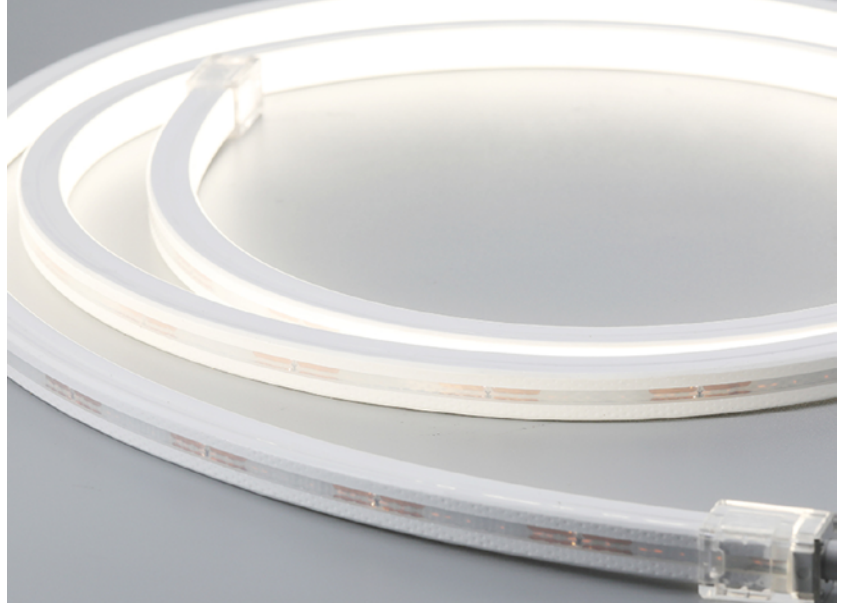

WAP 10W 1212 IP67 . 927

Model Power Dimensions IP grade CCT

Model	CCT
WAP	927 2700K
	930 3000K
Power	940 4000K
10W [W/m]	950 5000K
	960 6000K

Dimensions
12x12mm

IP grade
IP67

Accessories

Front feeding (30cm cable)	ACC00017
Side feeding (30cm cable)	ACC00018
Bottom feeding (30cm cable)	ACC00019
End cap	ACC00020
Stainless steel clip	ACC00021
Aluminium mounting profile L=1m	ACC00022

Features

LED type	SMD2835
LED nr.	120 LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/2500K/6500K
Beam angle	120°

Performance


Lumen output (at 85°C)	603 – 795lm/m (184 – 242lm/ft)
Color rendering index	>90
Efficacy	61 – 80lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.4A/m (0.12A/ft)
Max. power consumption	10W/m (3W/ft)
Dimming	External

Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.20kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it