
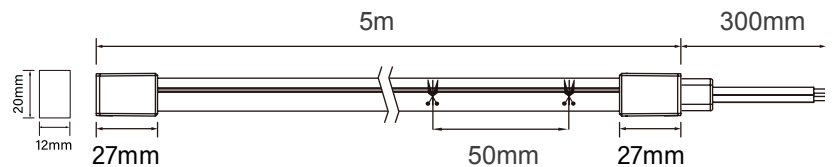


# WAP 1220

High quality silicone extrusion  
Fully waterproof  
Available in 5m and 10m reel (upon request)  
Cuttable on site  
300 mm feeding wires  
Max lenght from single connection: 10m

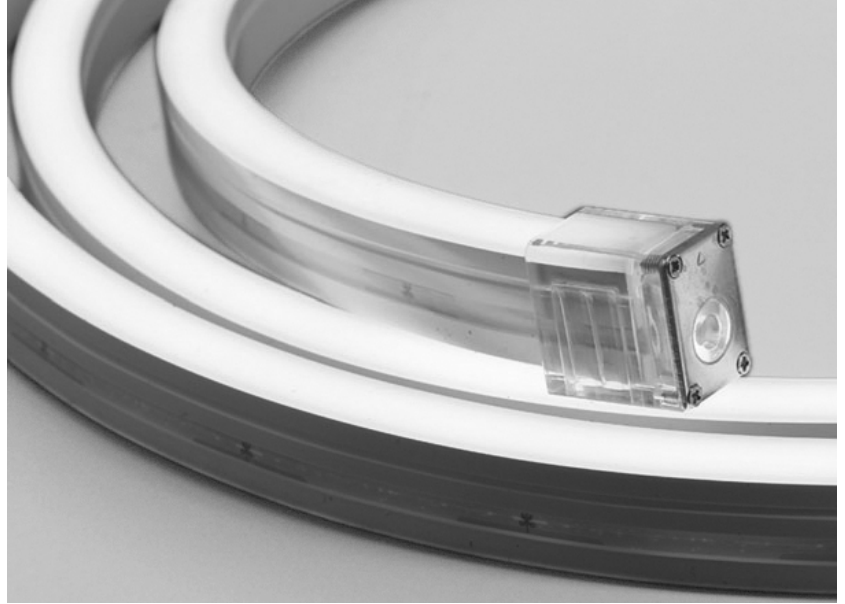

## WAP 10W 1220 IP67 . 927

Model Power Dimensions IP grade CCT

Model	CCT
WAP	927 2700K
	930 3000K
Power	940 4000K
10W [W/m]	950 5000K
	960 6000K

**Dimensions**  
12x20mm

**IP grade**  
IP67

### Accessories

Front feeding (30cm cable)	ACC00023
Side feeding (30cm cable)	ACC00024
Bottom feeding (30cm cable)	ACC00025
End cap	ACC00026
Stainless steel clip	ACC00027
Aluminium mounting profile L=1m	ACC00028

### Features

LED type	SMD2216
LED nr.	120LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/2500K/6500K
Beam angle	120°

### Performance



Lumen output (at 85°C)	450 – 650lm/m (136 – 220lm/ft)
Color rendering index	>90
Efficacy	45 – 65lm/W

### Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.40A/m (0.12A/ft)
Max. power consumption	10W/m (3W/ft)
Dimming	External

### Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.30kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: [sales@elinca.it](mailto:sales@elinca.it)