


WAP 1616 3D

2 sides bending
 High quality silicone extrusion
 Fully waterproof
 Available in 5m and 10m reel (upon request)
 Cutable on site
 300 mm feeding wires
 Max lenght from single connection: 10m

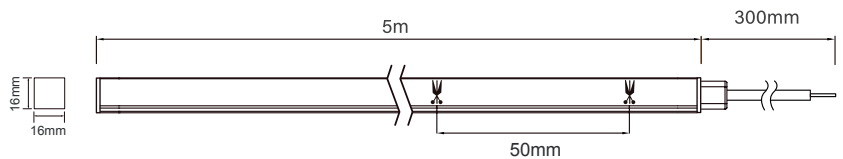

WAP 10W 163D IP67 . 927

Model Power Dimensions IP grade CCT

Model	CCT	
WAP	927	2700K
	930	3000K
Power	940	4000K
10W [W/m]	950	5000K
	960	6000K

Dimensions
16x16mm

IP grade
IP67

Accessories

Front feeding (30cm cable)	ACC00035
Side feeding (30cm cable)	ACC00036
End cap	ACC00037
Plastic clip	ACC00038
Aluminium mounting profile L=1m	ACC00039

Features

LED type	SMD2216
LED nr.	120LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/2500K/6500K
Beam angle	120°

Performance


Lumen output (at 85°C)	450 – 650lm/m (136 – 220lm/ft)
Color rendering index	>90
Efficacy	45 – 65lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.42A/m (0.13A/ft)
Max. power consumption	10W/m (3W/ft)
Dimming	External

Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.30kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it