


WAP D13

High quality silicone extrusion
 Matt finishing
 Fully waterproof
 Available in 5m and 10m reel (upon request)
 Cutable on site
 300 mm feeding wires
 Max lenght from single connection: 5m

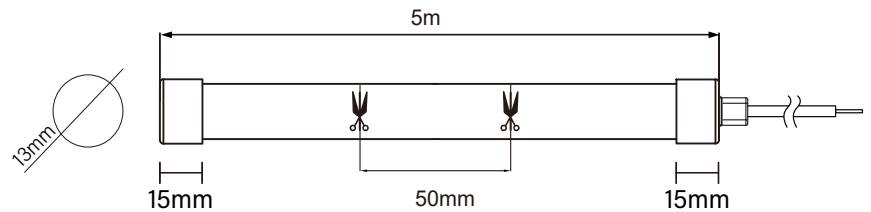

WAP 20W D13 IP65 . 927

Model Power Diameter IP grade CCT

Model	CCT	
WAP	927	2700K
	930	3000K
Power	940	4000K
20W [W/m]	950	5000K
	960	6000K
Diameter	RGB	RGB
D13mm		
IP grade		
IP65		

Features

LED type	SMD2835/SMD4040RGB
LED nr.	240LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K/RGB
Other CCT upon request	1800K/2100K/2300K/2500K/6500K
Beam angle	120°

Performance

Lumen output (at 85°C)	840 – 1260lm/m (256 – 384lm/ft)
Color rendering index	>90
Efficacy	42 – 63lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.83A/m (0.25A/ft)
Max. power consumption	20W/m (6W/ft)
Dimming	External

Accessories

Front feeding, white	ACC00040
Front feeding, RGB	ACC00041
End cap	ACC00042
Plastic clip	ACC00043
Suspension wire kit L=1.5m + clip	ACC00044
Metal feeding cap	ACC00045
Metal end cap	ACC00046
Suspension wire kit L=1.5m + metal sleeve	ACC00047

Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.30kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it