


WAP D22

High quality silicone extrusion
Matt finishing
Fully waterproof
Available in 5m and 10m reel (upon request)
Cutttable on site
300 mm feeding wires
Max lenght from single connection: 5m

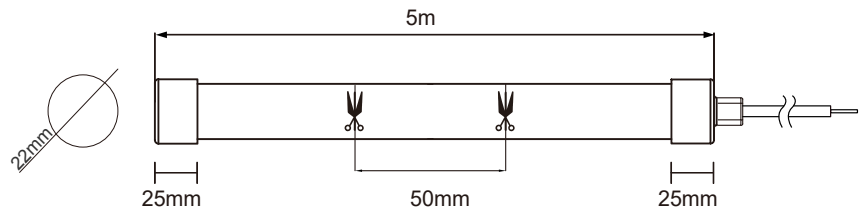

WAP 20W D22 IP65 . 927

Model Power Diameter IP grade CCT

Model	CCT	
WAP	927	2700K
	930	3000K
	940	4000K
Power 20W [W/m]	950	5000K
	960	6000K
	RGB	RGB
Diameter D22mm		
IP grade IP65		

Accessories

Front feeding, white	ACC00048
Front feeding, RGB	ACC00049
End cap	ACC00050
Plastic clip	ACC00051
Suspension wire kit L=1.5m + clip	ACC00052
Metal feeding cap	ACC00053
Metal end cap	ACC00054
Suspension wire kit L=1.5m + metal sleeve	ACC00055

Features

LED type	SMD2835/SMD4040RGB
LED nr.	240LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K/RGB
Other CCT upon request	1800K/2100K/2300K/2500K/6500K
Beam angle	120°

Performance

Lumen output (at 85°C)	840 – 1260lm/m (256 – 384lm/ft)
Color rendering index	>90
Efficacy	42 – 63lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.83A/m (0.25A/ft)
Max. power consumption	20W/m (6W/ft)
Dimming	External

Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.60kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it