


WAP D40

High quality silicone extrusion
Matt finishing
Fully waterproof
Available in 5m and 10m reel (upon request)
Cuttable on site
300 mm feeding wires
Max lenght from single connection: 5m

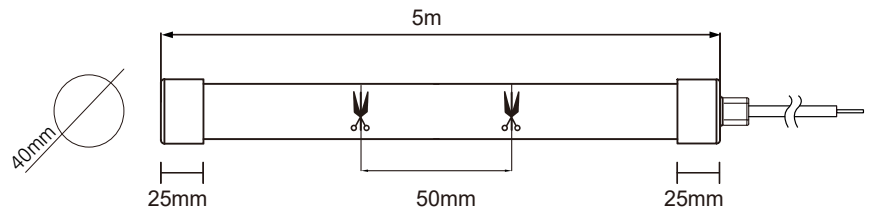

WAP 30W D40 IP65 . 927

Model Power Diameter IP grade CCT

Model	CCT
WAP	927 2700K
	930 3000K
Power	940 4000K
30W [W/m]	950 5000K
	960 6000K
Diameter	RGB RGB
D40mm	
IP grade	
IP65	

Accessories

Front feeding, white	ACC00056
Front feeding, RGB	ACC00057
End cap	ACC00058
Plastic clip	ACC00059
Suspension wire kit L=1.5m + clip	ACC00060
Metal feeding cap	ACC00061
Metal end cap	ACC00062
Suspension wire kit L=1.5m + metal sleeve	ACC00063

Features

LED type	SMD2835/SMD4040RGB
LED nr.	240LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K/RGB
Other CCT upon request	1800K/2100K/2300K/2500K/6500K
Beam angle	120°

Performance

Lumen output (at 85°C)	1260 – 1890lm/m (384 – 575lm/ft)
Color rendering index	>90
Efficacy	42 – 63lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	1.25A/m (0.41A/ft)
Max. power consumption	30W/m (9W/ft)
Dimming	External

Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	1.40kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V



Note: not all combinations of technical features are possible, please check with our technical office at the email address: sales@elinca.it