


ALV24-030IP20

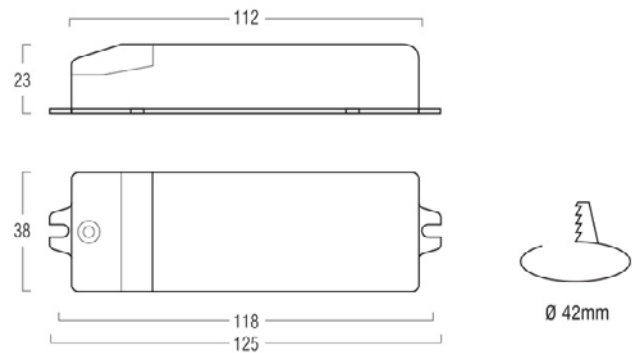

Technical specifications

Mains voltage AC	220-240V
Mains frequency	50/60Hz
Mains current	155mA
Inrush current	5A 50μsec
Power factor at max load	0,90C-0,96
Efficacy at full load	88%
Max output current	1,200mA
Output voltage	24V
Output power	29W
Ambient temperature Ta	-25 ÷ 50°C
Max case temperature on Tc	85°C
Weight	0,095Kg

Characteristics and advantages

Independent driver
Active PFC
Constant voltage version for power LED
Typical ripple voltage for voltage models <5%
Degree protection, IP20
IN Screwable terminals connection 2,5mmq
OUT terminals connection 1,5mmq
Class II protection
Surge protection 1KV differential mode
Short circuit, overload, open circuit and thermal protection
Nominal life-time up to 50000h at Tc max
Complying with EN61347-2-13, EN61347-1, EN62384, EN55015, EN61000-3-2, EN61547

