


ALV24-150IP20

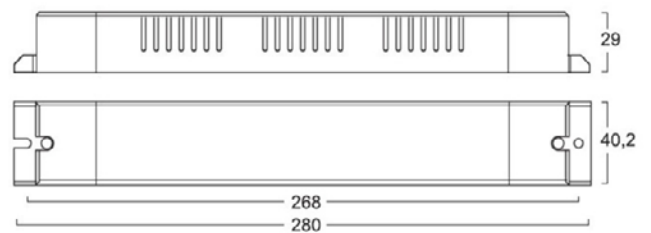

Technical specifications

Mains voltage AC	220-240V
Mains frequency	0/50/60Hz
Mains current	880mA
Inrush current	60A 230 μ sec
Power factor at max load	0,97
Efficacy at full load	91%
Max output current	6250mA
Output voltage	24V
Output power	150W
Ambient temperature Ta	-25 ÷ 40°C
Max case temperature on Tc	80°C
Weight	0,25Kg

Characteristics and advantages

- Independent driver
- Active PFC
- Constant voltage version for power LED
- Degree protection, IP20
- IN Screwable terminals connection 1,5mmq
- Class II protection
- Surge protection 4KV differential mode
- Short circuit, overload, open circuit and thermal protection
- High efficiency and absolute reliability
- Output ripple voltage <3%
- THD <10%
- Nominal life-time up to 50000h at Tc max
- Complying with EN61347-2-13, EN61347-1, EN62384, EN55015, EN61000-3-2, EN61547

