
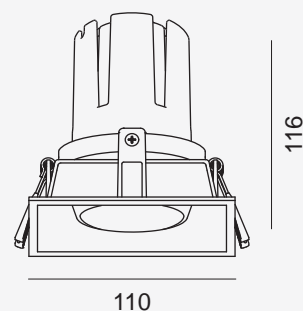


# OPUS 3

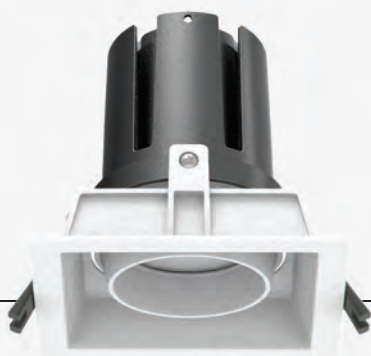

**Light output:** up to 2570lm   **Cut out:** 95x95mm   **Standard finishing:** ● ○

## Features

Introducing our OPUS 3, featuring a lumen output of 2124lm to 2570lm. Available in standard color temperatures of 2700K, 3000K, and 4000K, with additional options on request. This versatile product offers various beam angles ranging from 15° to 55°, making it ideal for office spaces. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

## Dimming options

For dimmable version add the following suffix to the Part number → -1V: 1-10V, -DA: DALI, -PU: Push, -TR: Triac.

## Applications

OPUS downlights are specifically designed to illuminate large commercial spaces and galleries. These fixtures deliver broad, even light distribution while maintaining excellent glare control, making them ideal for settings where visual comfort is a key point. Additionally, they ensure reliable, long-lasting performance, making them practical choices for any professional environment. Perfect for commercial spaces, retail displays, or exhibitions, OPUS enhances the overall atmosphere while effectively highlighting exhibits and products to create an engaging visual experiences.



OPUS 3 - 24W

	Optics	Output	CCT	Part number
<div>□ refers to finishing: B: Black, W: White. Other CCT upon request.</div>	15°	2141lm	2700K	A093.24W015□927
		2313lm	3000K	A093.24W015□930
		2570lm	4000K	A093.24W015□940
	24°	2133lm	2700K	A093.24W024□927
		2303lm	3000K	A093.24W024□930
		2559lm	4000K	A093.24W024□940
	35°	2133lm	2700K	A093.24W035□927
		2303lm	3000K	A093.24W035□930
		2559lm	4000K	A093.24W035□940
	55°	2124lm	2700K	A093.24W055□927
		2294lm	3000K	A093.24W055□930
		2549lm	4000K	A093.24W055□940