


OPUS-D 3

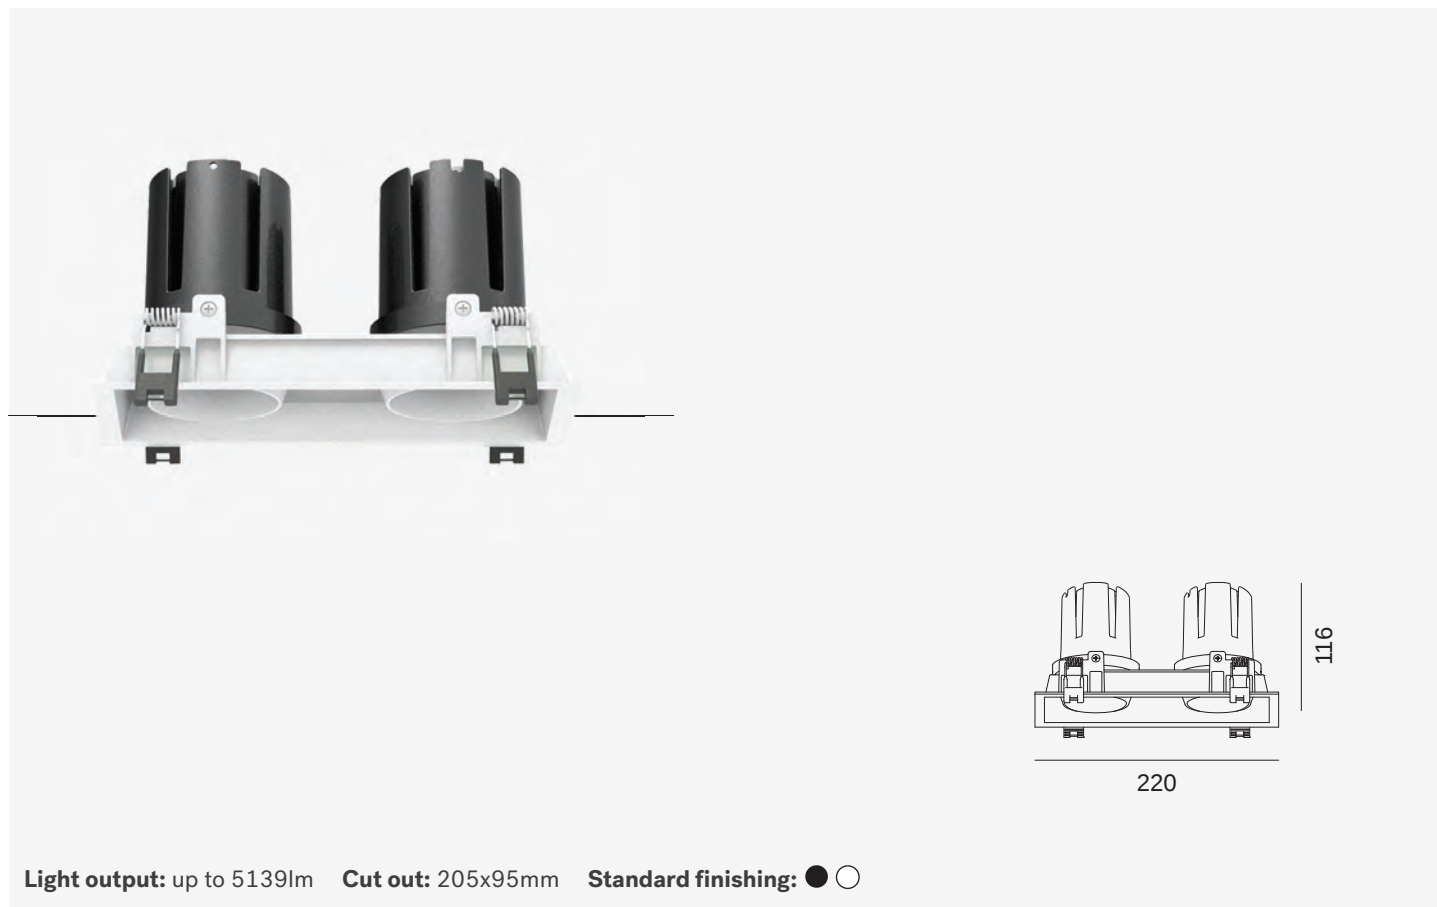

Features

Presenting our OPUS-D 3, featuring a lumen output of 4248lm to 5139lm. Available in standard color temperatures of 2700K, 3000K, and 4000K, with additional options on request. This versatile product offers various beam angles ranging from 15° to 55°, making it ideal for office spaces. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

Dimming options

For dimmable version add the following suffix to the Part number → -1V: 1-10V, -DA: DALI, -PU: Push, -TR: Triac.

Applications

OPUS-D downlights are specifically designed to illuminate large commercial spaces and galleries. These fixtures deliver broad, even light distribution while maintaining excellent glare control, making them ideal for settings where visual comfort is a key point. Additionally, they ensure reliable, long-lasting performance, making them practical choices for any professional environment. Perfect for commercial spaces, retail displays, or exhibitions, OPUS-D enhance the overall atmosphere while effectively highlighting exhibits and products to create an engaging visual experiences.



OPUS-D 3 - 48W

	Optics	Output	CCT	Part number
□ refers to finishing: B: Black, W: White. Other CCT upon request.	15°	4283lm	2700K	A098.48W015□927
		4625lm	3000K	A098.48W015□930
		5139lm	4000K	A098.48W015□940
	24°	4266lm	2700K	A098.48W024□927
		4607lm	3000K	A098.48W024□930
		5119lm	4000K	A098.48W024□940
	35°	4266lm	2700K	A098.48W035□927
		4607lm	3000K	A098.48W035□930
		5119lm	4000K	A098.48W035□940
	55°	4248lm	2700K	A098.48W055□927
		4588lm	3000K	A098.48W055□930
		5098lm	4000K	A098.48W055□940