
ABSOLUTE-R 2

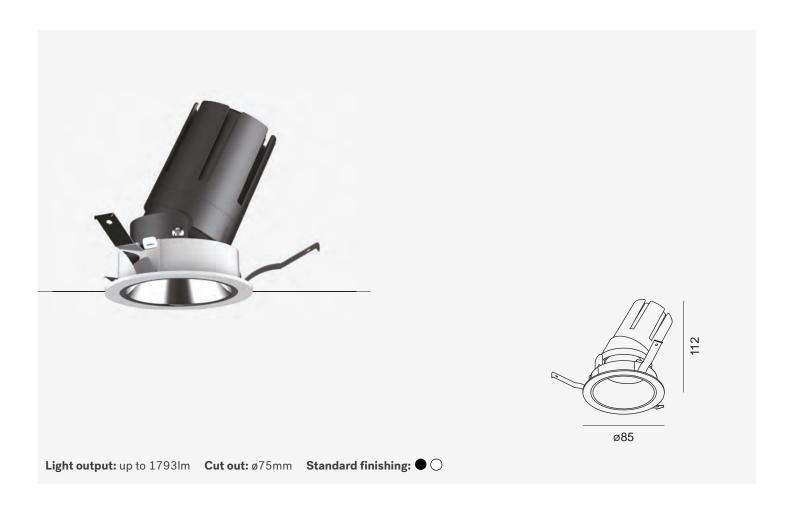

Features

Displaying our ABSOLUTE-R 2, featuring a lumen output of 1309lm to 1793lm. Available in standard color temperatures of 2700K, 3000K, and 4000K, with additional options on request. This versatile product offers various beam angles ranging from 15° to 35°, making it ideal for high-end solution. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

Dimming options

For dimmable version add the following suffix to the Part number → -1V: 1-10V, -DA: DALI, -PU: Push, -TR: Triac.

Applications

ABSOLUTE-R premium recessed downlights are designed to bring elegance and versatility to high-end spaces. With their adjustable rotation features, they allow you to create both dramatic accent lighting and soft, diffuse illumination. Perfect for luxury hotels, upscale suites, and refined interiors, these downlights add sophistication to any environment. Their sleek designs enhance the atmosphere in spaces such as hotel entrances, stairways, and other premium settings, ensuring every corner is beautifully lit. Combining exceptional quality with functionality, ABSOLUTE-R elevates any space.

























www.elinca.it Downlights

| Optics | Output | ССТ | Part number |
|--------|--------|--|--|
| 15° | 1315lm | 2700K | A039.12W015□927 |
| | 1420lm | 3000K | A039.12W015□930 |
| | 1578lm | 4000K | A039.12W015□940 |
| 24° | 1309lm | 2700K | A039.12W024□927 |
| | 1414lm | 3000K | A039.12W024□930 |
| | 1571lm | 4000K | A039.12W024□940 |
| 35° | 1309lm | 2700K | A039.12W035□927 |
| | 1414lm | 3000K | A039.12W035□930 |
| | 1571lm | 4000K | A039.12W035□940 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | 15°24° | 15° 1315lm 1420lm 1578lm 24° 1309lm 1414lm 1571lm 35° 1309lm 1414lm | 15° 1315lm 2700K 1420lm 3000K 1578lm 4000K 24° 1309lm 2700K 1414lm 3000K 1571lm 4000K 35° 1309lm 2700K 1414lm 3000K |

| ABSOLUTE-R 2 - 15W | Optics | Output | ССТ | Part number |
|--|--------|----------------------------|-------------------------|---|
| | 15° | 1494lm 1614lm 1793lm | 2700K 3000K 4000K | A040.15W015□927 A040.15W015□930 A040.15W015□940 |
| | 24° | 1488lm 1607lm 1786lm | 2700K 3000K 4000K | A040.15W024□927 A040.15W024□930 A040.15W024□940 |
| ☐ refers to finishing: B: Black, W: White. Standard configuration: W, white body, mirror silver reflector. Other CCT upon request. | 35° | 1488lm 1607lm 1786lm | 2700K 3000K 4000K | A040.15W035□927 A040.15W035□930 A040.15W035□940 |

| Accessories | Description | Part number |
|-------------|---------------------------|-------------|
| | Matt black reflector | ACC00919 |
| | Matt silver reflector | ACC00920 |
| | Matt white reflector | ACC00921 |
| | Mirror silver reflector | ACC00922 |
| | Mirror titanium reflector | ACC00923 |
| | Honeycomb | ACC00924 |
| | | |
| | | |
| | | |

