


DIRECT 2

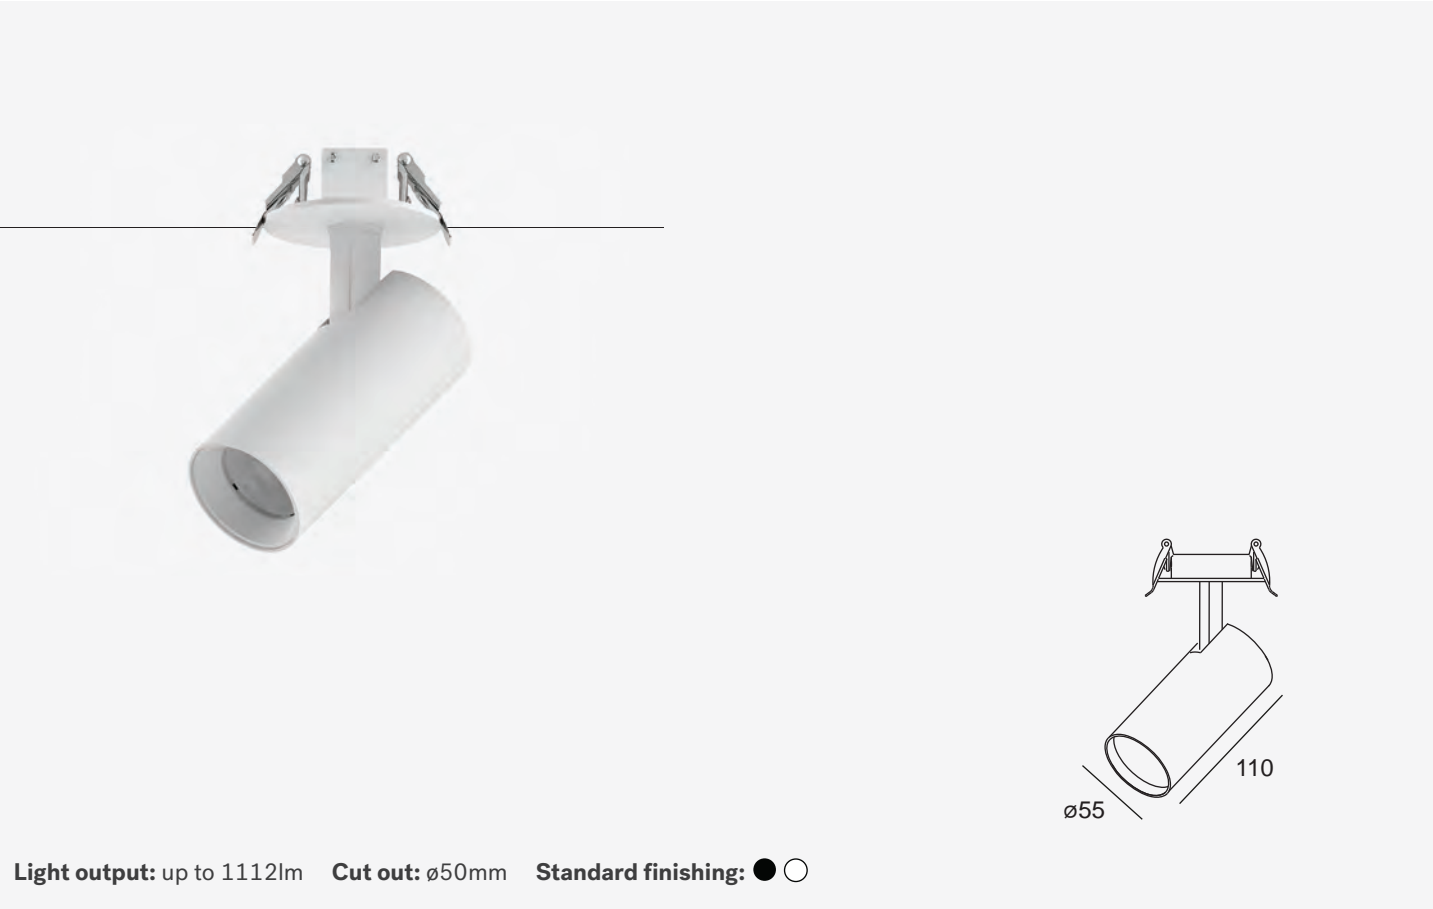

Features

Highlighting our DIRECT 2, featuring a lumen output of 919lm to 1112lm. Available in standard color temperatures of 2700K, 3000K, and 4000K, with additional options on request. This versatile product offers various beam angles ranging from 15° to 60°, making it ideal for hotel spaces and galleries. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

Dimming options

For dimmable version add the following suffix to the Part number → -1V: 1-10V, -DA: DALI, -PU: Push, -TR: Triac.

Applications

DIRECT ceiling-mounted projectors are designed with simple and minimalist aesthetics to fit either hotel spaces or high-end retail shops. Their essential designs seamlessly integrate into any environment, while their adjustable features ensure precise and customizable lighting. Perfect for hotel spaces and galleries, for high-end retail shops and exhibitions, DIRECT offers both style and functionality, providing the ideal lighting solutions for premium interiors.



























DIRECT 2 - 10W

	Optics	Output	CCT	Part number
□ refers to finishing: B: Black, W: White. Other CCT upon request.	15°	926lm	2700K	A113.10W015□927
		1000lm	3000K	A113.10W015□930
		1112lm	4000K	A113.10W015□940
	24°	923lm	2700K	A113.10W024□927
		996lm	3000K	A113.10W024□930
		1107lm	4000K	A113.10W024□940
	38°	920lm	2700K	A113.10W038□927
		993lm	3000K	A113.10W038□930
		1104lm	4000K	A113.10W038□940
	60°	919lm	2700K	A113.10W060□927
		992lm	3000K	A113.10W060□930
		1103lm	4000K	A113.10W060□940