
## HALL 4

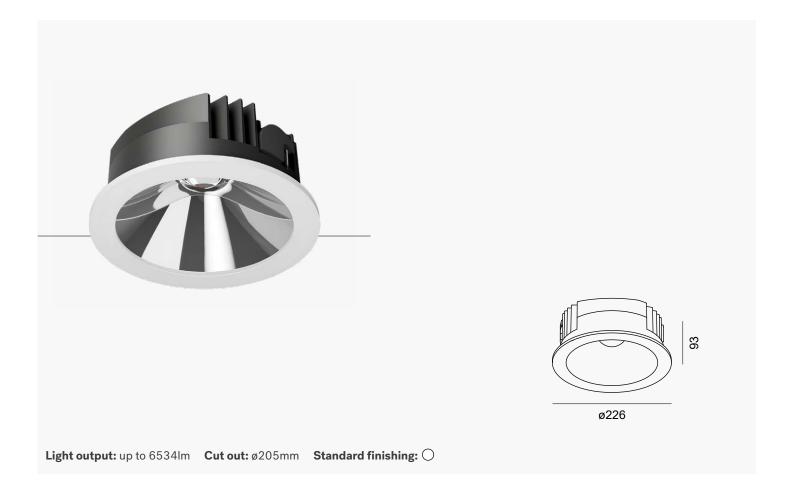

## **Features**

Showcasing our HALL 4, featuring a lumen output of 3261lm to 6534lm. Available in standard color temperatures of 2700K, 3000K, and 4000K, with additional options on request. This versatile product offers various beam angles ranging from 30° to 75°, making it ideal for halls and corridors. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

## **Dimming options**

For dimmable version add the following suffix to the Part number → -1V: 1-10V, -DA: DALI, -PU: Push, -TR: Triac.

## **Applications**

HALL downlights are state-of-the-art solutions offering the perfect balance of visual comfort and luminous efficiency. Designed for high ceilings, they deliver impressive lumen output, making them ideal for retail spaces, offices, airports, and theatres. With powerful light output, they ensure every area is brightly lit. Whether you're creating a welcoming retail atmosphere, boosting productivity in an office, or setting the perfect ambiance in a theatre, HALL downlights are the ultimate choices for high-performance lighting that elevates any environment.

























HALL 4 - 30W	Optics	Output	ССТ	Part number
	30°	3280lm	2700K	A073.30W030W927
		3542lm	3000K	A073.30W030W930
		3936lm	4000K	A073.30W030W940
	45°	3266lm	2700K	A073.30W045W927
		3528lm	3000K	A073.30W045W930
		3920lm	4000K	A073.30W045W940
	75°	3261lm	2700K	A073.30W075W927
		3521lm	3000K	A073.30W075W930
		3912lm	4000K	A073.30W075W940
Other CCT upon request.				

HALL 4 - 40W	Optics	Output	ССТ	Part number
	30°	4633lm	2700K	A074.40W030W927
		5003lm	3000K	A074.40W030W930
		5559lm	4000K	A074.40W030W940
	45°	4614lm	2700K	A074.40W045W927
		4783lm	3000K	A074.40W045W930
		5536lm	4000K	A074.40W045W940
	75°	4605lm	2700K	A074.40W075W927
		4973lm	3000K	A074.40W075W930
		5526lm	4000K	A074.40W075W940
Other CCT upon request.				

HALL 4 - 50W	Optics	Output	ССТ	Part number
	30°	5446lm	2700K	A075.50W030W927 A075.50W030W930
		5881lm 6534lm	3000K 4000K	A075.50W030W940
	45°	5423lm	2700K	A075.50W045W927
		5858lm 6508lm	3000K 4000K	A075.50W045W930 A075.50W045W940
	75°	5412lm 5845lm 6495lm	2700K 3000K 4000K	A075.50W075W927 A075.50W075W930 A075.50W075W940
Other CCT upon request.				

