


# IRIS 2

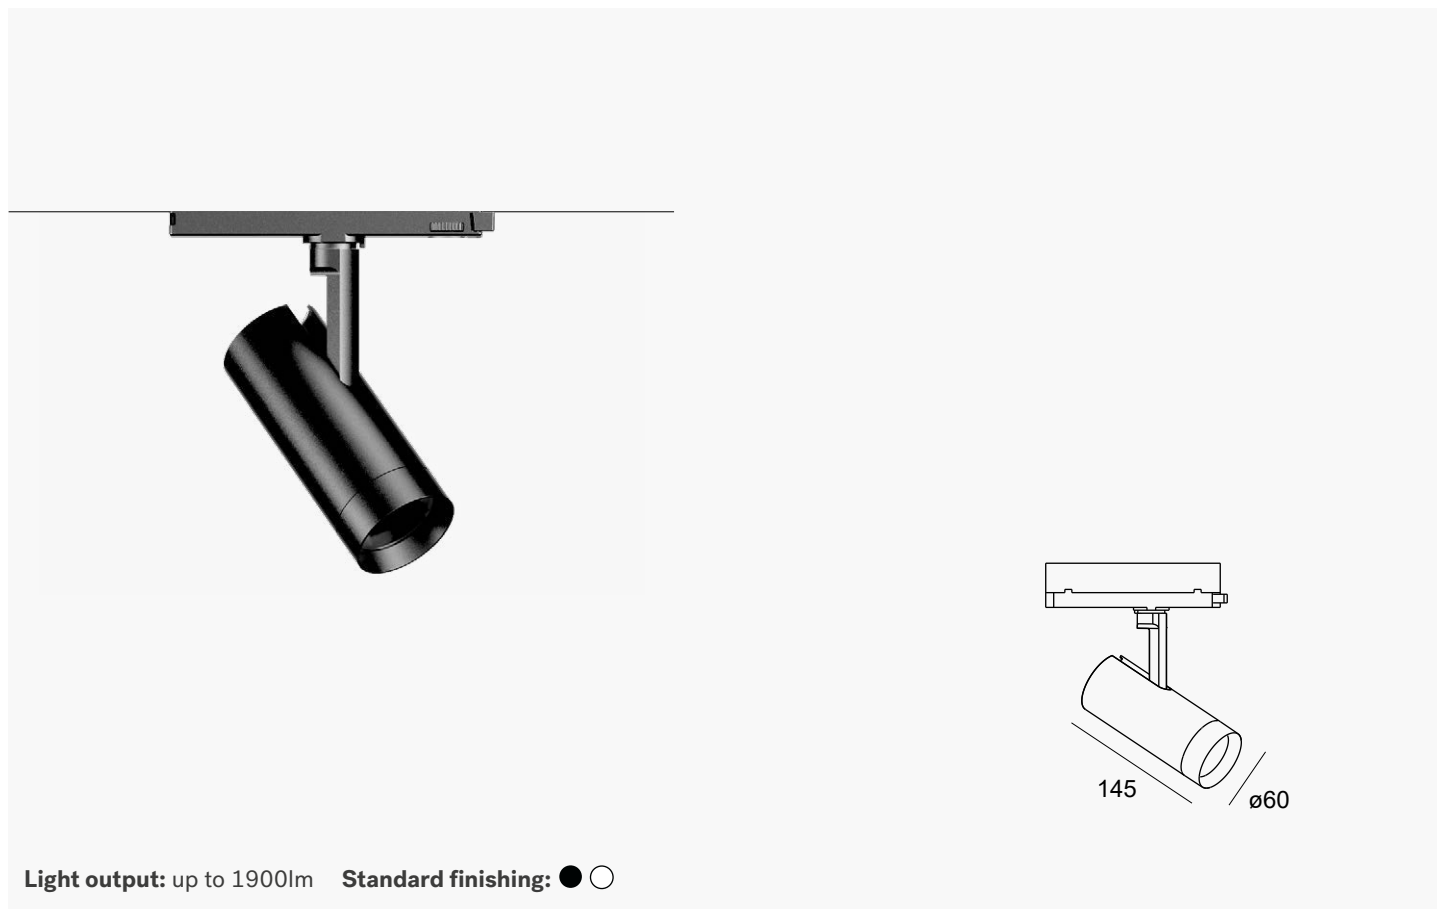

## Features

Showcasing our IRIS 2, featuring a lumen output of 1414lm to 1900lm. Available in static white, tunable white and dim-to-warm, with additional options on request. This versatile product offers various beam angles ranging from 15° to 50°, making it ideal for museum and art gallery. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

## Dimming options


For dimmable version add the following suffix to the Part number → -DA: DALI.

## Applications

IRIS high-performance projectors are the top choices for luxury boutiques, delivering precise, high-quality lighting that enhances every detail. With comprehensive ranges of accessories, our track systems stand out as some of the most complete on the market, providing unmatched flexibility and reliability. Designed to adapt to diverse applications, they ensure seamless installations and consistent performances, making them the ideal solutions for sophisticated retail environments that demand both elegance and functionality.



**IRIS 2 - 20W - White**

|  | Optics | Output | CCT   | Part number     |
|--|--------|--------|-------|-----------------|
| <div>            □ refers to finishing:<br/>           B: Black, W: White.<br/>           Other CCT upon request.         </div> | 15°    | 1584lm | 2700K | R009.20W015□927 |
|  |        | 1710lm | 3000K | R009.20W015□930 |
|  |        | 1900lm | 4000K | R009.20W015□940 |
|  | 24°    | 1577lm | 2700K | R009.20W024□927 |
|  |        | 1703lm | 3000K | R009.20W024□930 |
|  |        | 1893lm | 4000K | R009.20W024□940 |
|  | 36°    | 1577lm | 2700K | R009.20W036□927 |
|  |        | 1703lm | 3000K | R009.20W036□930 |
|  |        | 1893lm | 4000K | R009.20W036□940 |
|  | 50°    | 1571lm | 2700K | R009.20W050□927 |
|  |        | 1697lm | 3000K | R009.20W050□930 |
|  |        | 1885lm | 4000K | R009.20W050□940 |

**IRIS 2 - 20W - Tunable white**



|     |        |        |                 |                 |
|-----|--------|--------|-----------------|-----------------|
| 15° | 1425lm | 2700K  | R010.20W015□CCT |                 |
|     | 1767lm | 6500K  |                 |                 |
|     | 24°    | 1420lm | 2700K           | R010.20W024□CCT |
|     |        | 1760lm | 6500K           |                 |
|     | 36°    | 1420lm | 2700K           | R010.20W036□CCT |
|     |        | 1760lm | 6500K           |                 |
|     | 50°    | 1414lm | 2700K           | R010.20W050□CCT |
|     |        | 1753lm | 6500K           |                 |

□ refers to finishing:  
B: Black, W: White.  
Other CCT upon request.

**IRIS 2 - 20W - Dim-to-warm**

|   | Optics | Output | CCT         | Part number     |
|---|--------|--------|-------------|-----------------|
| <div>  </div>                                 | 15°    | 1539lm | 1800K-3000K | R011.20W015□DTW |
|   | 24°    | 1533lm | 1800K-3000K | R011.20W024□DTW |
|   | 36°    | 1533lm | 1800K-3000K | R011.20W036□DTW |
|   | 50°    | 1527lm | 1800K-3000K | R011.20W050□DTW |
| <div>           □ refers to finishing:<br/>           B: Black, W: White.<br/>           Other CCT upon request.         </div> |        |        |             |                 |