


IRIS-Z 1

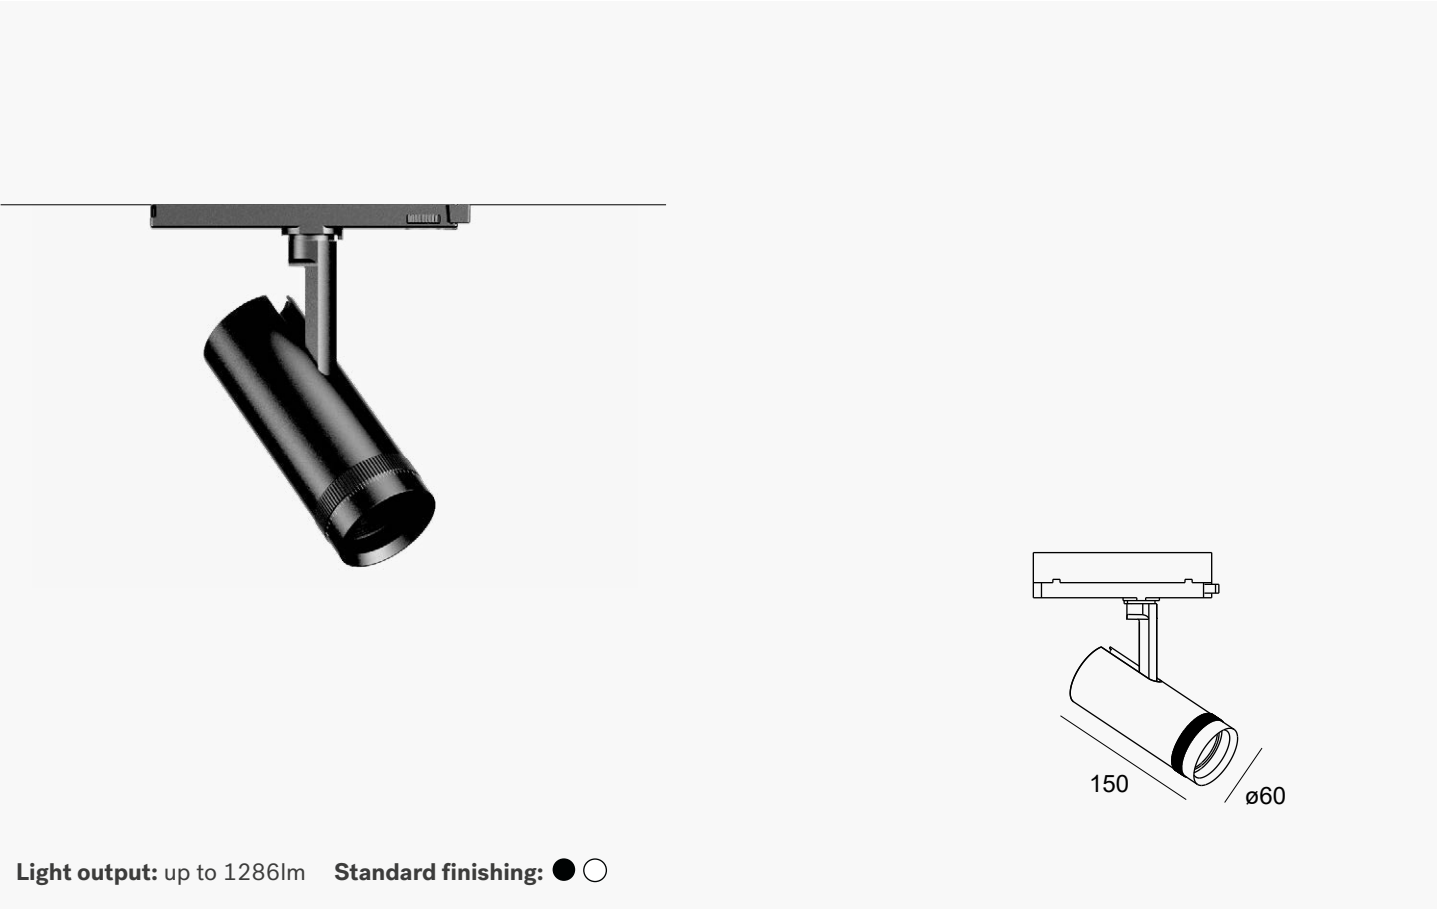

Features

Highlighting our IRIS-Z 1, featuring a lumen output of 573lm to 1286lm. Available in standard color temperatures of 2700K, 3000K, and 4000K, with additional options on request. This versatile product offers zoomable beam angles ranging from 11÷60° to 11÷52°, making it ideal for museum and art gallery. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

Dimming options

For dimmable version add the following suffix to the Part number → -DA: DALI.

Applications

IRIS-Z premium zoom projectors are the ideal choices for galleries and museums, offering high-performance lighting with adjustable beam angles for precise focus on artworks and exhibits. Designed for maximum flexibility, they adapt to changing display needs while maintaining exceptional visual quality. Paired with our comprehensive track systems and accessories, they provide seamless integration, reliable performance, and refined control, making them perfect for sophisticated cultural spaces that demand both precision and discretion.



IP20

AC
240V

Dimmable

LM80

SDCM
<2

CRI
>95

ZOOM











IRIS-Z 1 - 10W

Optics	Output	CCT	Part number
11÷60°	573lm	2700K	R016.10W1160□927
	619lm	3000K	R016.10W1160□930
	688lm	4000K	R016.10W1160□940

□ refers to finishing:
B: Black, W: White.
Other CCT upon request.

IRIS-Z 1 - 20W

Optics	Output	CCT	Part number
11÷52°	1072lm	2700K	R017.20W1152□927
	1158lm	3000K	R017.20W1152□930
	1286lm	4000K	R017.20W1152□940

□ refers to finishing:
B: Black, W: White.
Other CCT upon request.