
LUXE-SQ 1

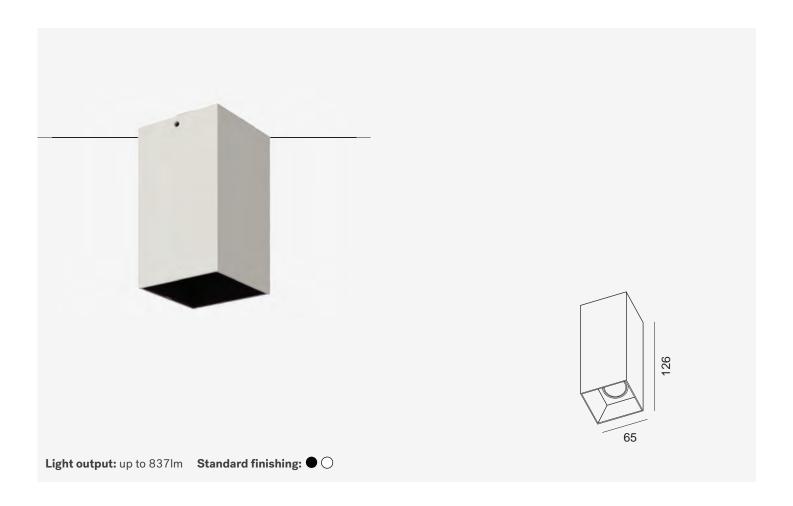

Features

Presenting our LUXE-SQ 1, featuring a lumen output of 494lm to 837lm. Available in standard color temperatures of 2700K, 3000K, and 4000K, with additional options on request. This versatile product offers various beam angles ranging from 15° to 55°, making it ideal for lively public spaces. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

Applications

LUXE-SQ are surface-mounted downlights that combine functionality and style, making them suitable for any environment. Designed for easy installation, they eliminate the need for recessed housing, ensuring seamless integration. Their elegant, minimalist designs provide focused illumination while enhancing the overall aesthetics of the spaces. Versatile and adaptable, LUXE-SQ are perfect for a wide range of settings, from contemporary restaurants to vibrant public interiors. They blend with different styles and contexts, ensuring your lighting designs are both functional and visually appealing.





















www.elinca.it Downlights

LUXE-SQ 1 - 6W	Optics	Output	ССТ	Part number
	15°	498lm	2700K	F008.06W015□927
		538lm	3000K	F008.06W015□930
		598lm	4000K	F008.06W015□940
	24°	496lm	2700K	F008.06W024□927
		536lm	3000K	F008.06W024□930
		596lm	4000K	F008.06W024□940
	35°	496lm	2700K	F008.06W035□927
		536lm	3000K	F008.06W035□930
☐ refers to finishing: B: Black, W: White. Standard configuration: W, white body, black reflector. Other CCT upon request.		596lm	4000K	F008.06W035□940
	55°	494lm	2700K	F008.06W055□927
		534lm	3000K	F008.06W055□930
		593lm	4000K	F008.06W055□940

LUXE-SQ 1 - 9W	Optics	Output	ССТ	Part number
	15°	697lm	2700 K	F009.09W015 \$\Big 927
		753lm 837lm	3000 K 4000 K	F009.09W015□930 F009.09W015□940
	24°	694lm	2700K	F009.09W024□927
		750lm	3000K	F009.09W024□930
		833lm	4000K	F009.09W024□940
	35°	694lm	2700K	F009.09W035□927
		750lm	3000K	F009.09W035□930
☐ refers to finishing:		833lm	4000K	F009.09W035□940
B: Black, W: White.	55°	692lm	2700K	F009.09W055□927
Standard configuration:		744lm	3000K	F009.09W055□930
W, white body, black reflector. Other CCT upon request.		830lm	4000K	F009.09W055□940

Accessories	Description	Part number
	Matt black reflector	ACC01212
	Matt white reflector	ACC01213
	Matt silver reflector	ACC01121
	Mirror silver reflector	ACC01122
	Mirror titanium reflector	ACC01123
	Honeycomb	ACC01124

