
LUXE-SQ 3

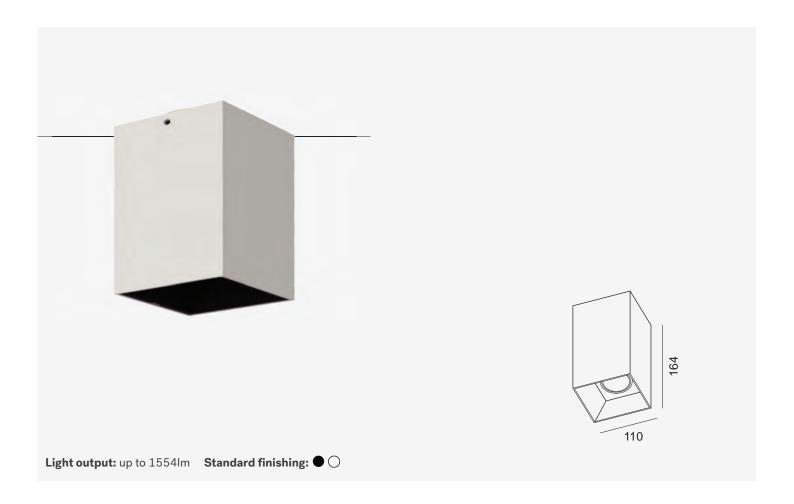

Features

Presenting our LUXE-SQ 3, featuring a lumen output of 988lm to 1554lm. Available in standard color temperatures of 2700K, 3000K, and 4000K, with additional options on request. This versatile product offers various beam angles ranging from 15° to 55°, making it ideal for lively public spaces. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

Applications

LUXE-SQ are surface-mounted downlights that combine functionality and style, making them suitable for any environment. Designed for easy installation, they eliminate the need for recessed housing, ensuring seamless integration. Their elegant, minimalist designs provide focused illumination while enhancing the overall aesthetics of the spaces. Versatile and adaptable, LUXE-SQ are perfect for a wide range of settings, from contemporary restaurants to vibrant public interiors. They blend with different styles and contexts, ensuring your lighting designs are both functional and visually appealing.























www.elinca.it Downlights

LUXE-SQ 3 - 12W	Optics	Output	ССТ	Part number
□ refers to finishing: B: Black, W: White. Standard configuration: W, white body, black reflector. Other CCT upon request.	15°	996lm 1076lm 1195lm	2700K 3000K 4000K	F012.12W015□927 F012.12W015□930 F012.12W015□940
	24°	992lm 1071lm 1190lm	2700K 3000K 4000K	F012.12W024□927 F012.12W024□930 F012.12W024□940
	35°	992lm 1071lm 1190lm	2700K 3000K 4000K	F012.12W035□927 F012.12W035□930 F012.12W035□940
	55°	988lm 1067lm 1186lm	2700K 3000K 4000K	F012.12W055□927 F012.12W055□930 F012.12W055□940

LUXE-SQ 3 - 15W	Optics	Output	ССТ	Part number
	15°	1295lm	2700K	F013.15W015□927
		1398lm	3000K	F013.15W015□930
		1554lm	4000K	F013.15W015□940
	24°	1290lm	2700K	F013.15W024□927
		1393lm	3000K	F013.15W024□930
		1548lm	4000K	F013.15W024□940
	35°	1290lm	2700K	F013.15W035□927
		1393lm	3000K	F013.15W035□930
☐ refers to finishing:		1548lm	4000K	F013.15W035□940
B: Black, W: White.	55°	1284lm	2700K	F013.15W055□927
Standard configuration:		1381lm	3000K	F013.15W055□930
W, white body, black reflector. Other CCT upon request.		1541lm	4000K	F013.15W055□940

Accessories	Description	Part number
	Matt black reflector	ACC01129
	Matt white reflector	ACC01130
	Honeycomb	ACC01131