


# MOON 3

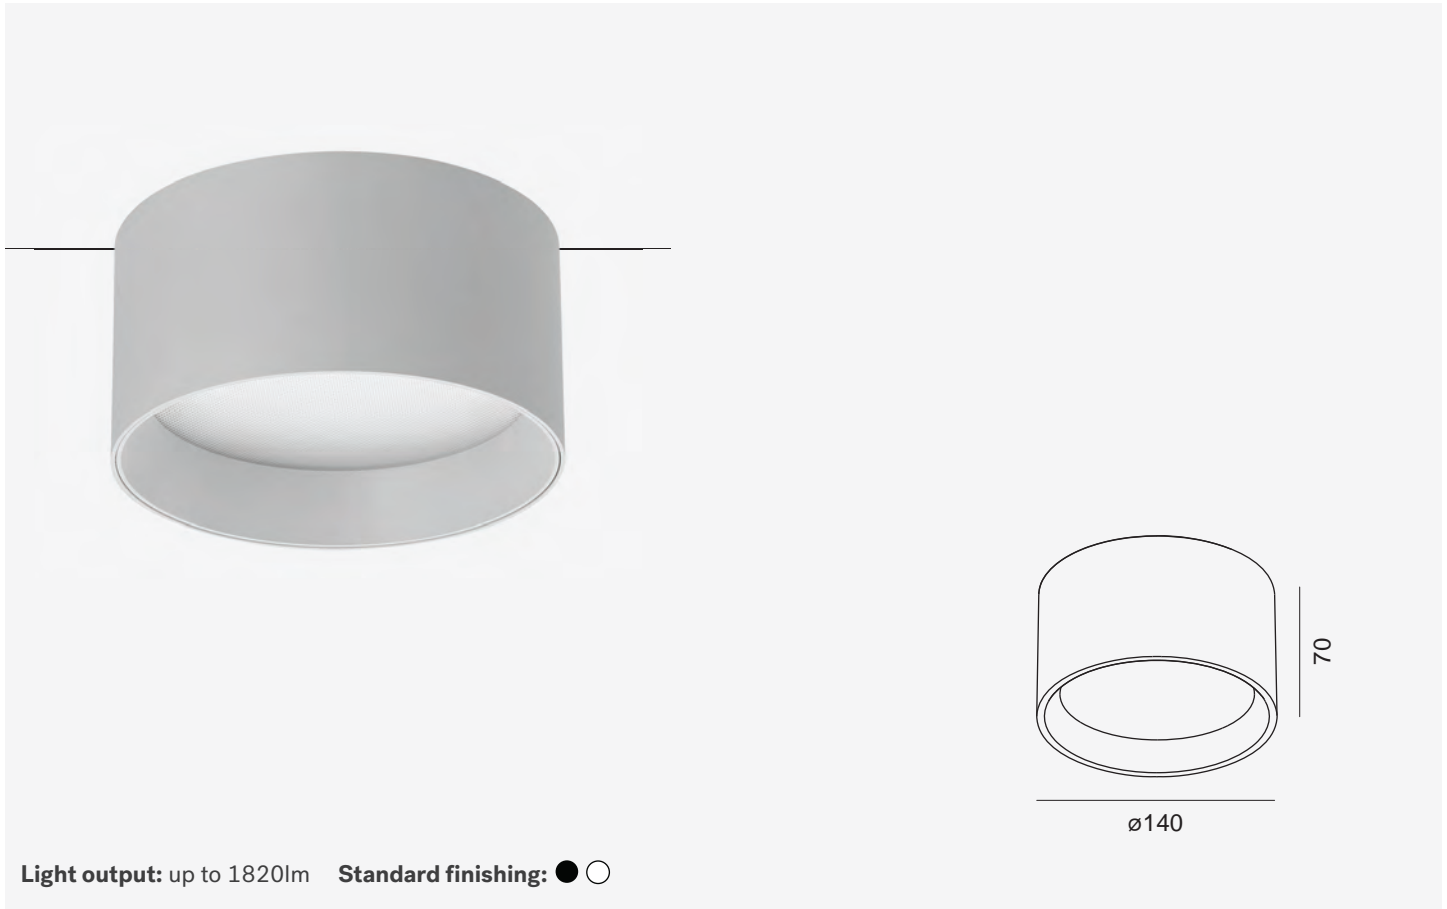

## Features

Displaying our MOON 3, featuring a lumen output of 1516lm to 1820lm. Available in standard color temperatures of 2700K, 3000K, and 4000K, with additional options on request. This adaptable product offers a 80° beam angle, making it ideal for vibrant retail spaces. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

## Dimming options

For dimmable version add the following suffix to the Part number → -1V: 1-10V, -DA: DALI, -PU: Push, -TR: Triac.

## Applications

MOON are surface-mounted ceiling lightings designed to provide simple, effective lighting while enhancing any space with their diffuse and comfortable illumination. These versatile products meet the practical needs for efficient lighting and enrich the ambiance of their surroundings. Whether used in vibrant retail spaces, cozy cafés, or lively bars, MOON excel in creating inviting atmospheres. Their adaptability also makes them ideal for professional settings, such as offices and hotels, as well as private residences, contributing to a warm, welcoming environment in any setting.



**MOON 3 - 15W****Optics****Output****CCT****Part number**

80°

1516lm

2700K

F018.15W080□927

1637lm

3000K

F018.15W080□930

1820lm

4000K

F018.15W080□940

□ refers to finishing:  
B: Black, W: White.  
Standard configuration:  
W, white body, white inner ring.  
Other CCT upon request.

**Accessories****Description****Part number**

Matt black inner ring

ACC01119

Matt white inner ring

ACC01120

Mirror gold inner ring

ACC01138