


# OPUS-D 4

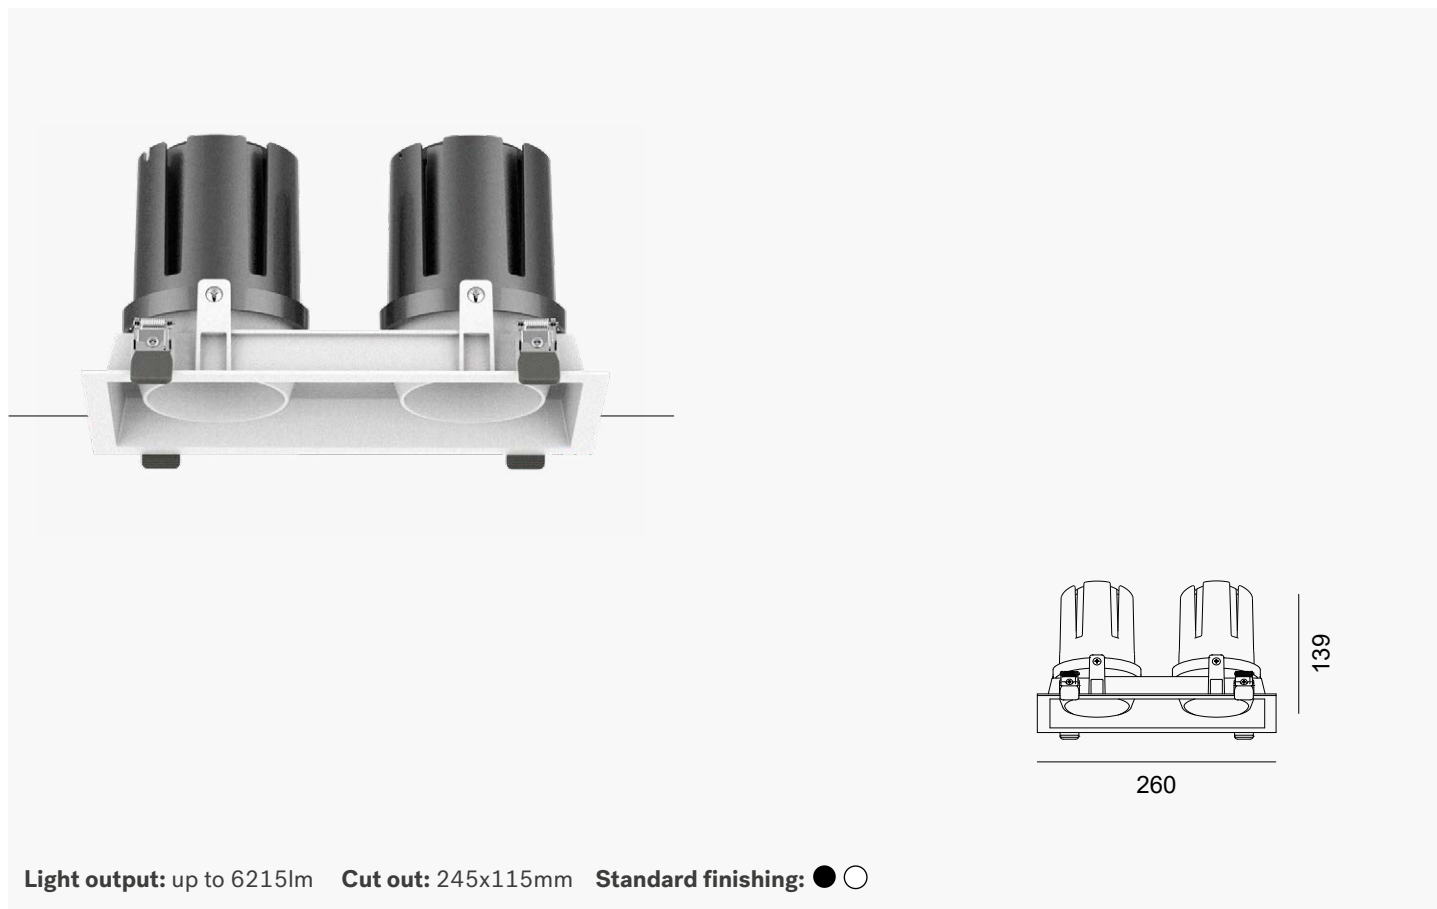

## Features

Presenting our OPUS-D 4, featuring a lumen output of 5138lm to 6215lm. Available in standard color temperatures of 2700K, 3000K, and 4000K, with additional options on request. This versatile product offers various beam angles ranging from 15° to 55°, making it ideal for office spaces. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

## Dimming options

For dimmable version add the following suffix to the Part number → -1V: 1-10V, -DA: DALI, -PU: Push, -TR: Triac.

## Applications

OPUS-D downlights are specifically designed to illuminate large commercial spaces and galleries. These fixtures deliver broad, even light distribution while maintaining excellent glare control, making them ideal for settings where visual comfort is a key point. Additionally, they ensure reliable, long-lasting performance, making them practical choices for any professional environment. Perfect for commercial spaces, retail displays, or exhibitions, OPUS-D enhance the overall atmosphere while effectively highlighting exhibits and products to create an engaging visual experience.



**OPUS-D 4 - 56W (2x28W)**

Optics	Output	CCT	Part number
15°	5179lm	2700K	A099.56W015□927
	5594lm	3000K	A099.56W015□930
	6215lm	4000K	A099.56W015□940
24°	5158lm	2700K	A099.56W024□927
	5571lm	3000K	A099.56W024□930
	6190lm	4000K	A099.56W024□940
35°	5158lm	2700K	A099.56W035□927
	5571lm	3000K	A099.56W035□930
	6190lm	4000K	A099.56W035□940
55°	5138lm	2700K	A099.56W055□927
	5549lm	3000K	A099.56W055□930
	6165lm	4000K	A099.56W055□940

□ refers to finishing:  
B: Black, W: White.  
Other CCT upon request.