
POP-UP 2

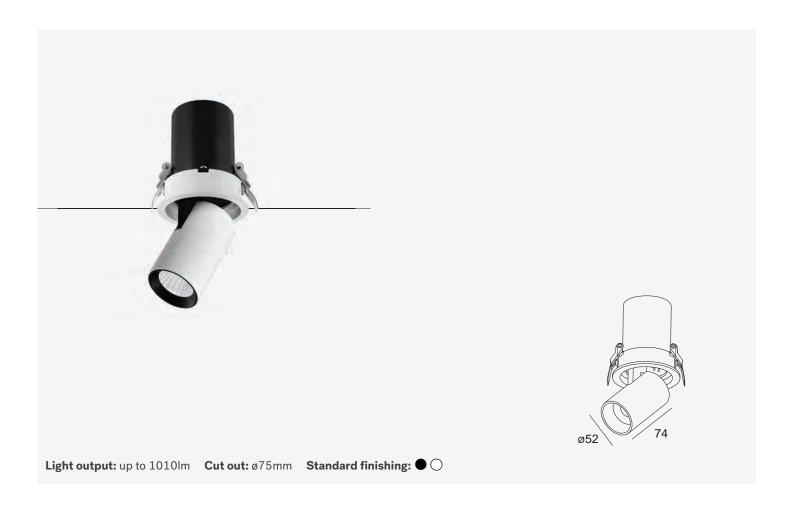

Features

Showcasing our POP-UP 2, featuring a lumen output of 835lm to 1010lm. Available in standard color temperatures of 2700K, 3000K, and 4000K, with additional options on request. This versatile product offers various beam angles ranging from 10° to 50°, making it ideal for retail and art gallery spaces. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

Dimming options

For dimmable version add the following suffix to the Part number \rightarrow -1V: 1-10V, -DA: DALI, -PU: Push, -TR: Triac.

Applications

POP-UP adjustable recessed projectors are perfect solutions for lighting up retail spaces, art galleries, and car showrooms. The high CRI ensures colours are seen in their natural, vivid forms. Their extreme adjustability and the ability to retract the bodies completely offer great flexibility and adaptability, making them ideal for quick changes in settings. This makes POP-UP versatile and efficient solutions for environments that require frequent transformations.



























www.elinca.it Downlights

POP-UP 2 - 10W	Optics	Output	ССТ	Part number
	10°	842lm	2700K	A108.10W010□927
		909lm	3000K	A108.10W010□930
		1010lm	4000K	A108.10W010□940
	24°	838lm	2700K	A108.10W024□927
		905lm	3000K	A108.10W024□930
		1006lm	4000K	A108.10W024□940
	38°	836lm	2700K	A108.10W038□927
		903lm	3000K	A108.10W038□930
		1003lm	4000K	A108.10W038□940
	50°	835lm	2700K	A108.10W050□927
☐ refers to finishing:		902lm	3000K	A108.10W050□930
B: Black, W: White. Other CCT upon request.		1002lm	4000K	A108.10W050□940