


# SUN 3

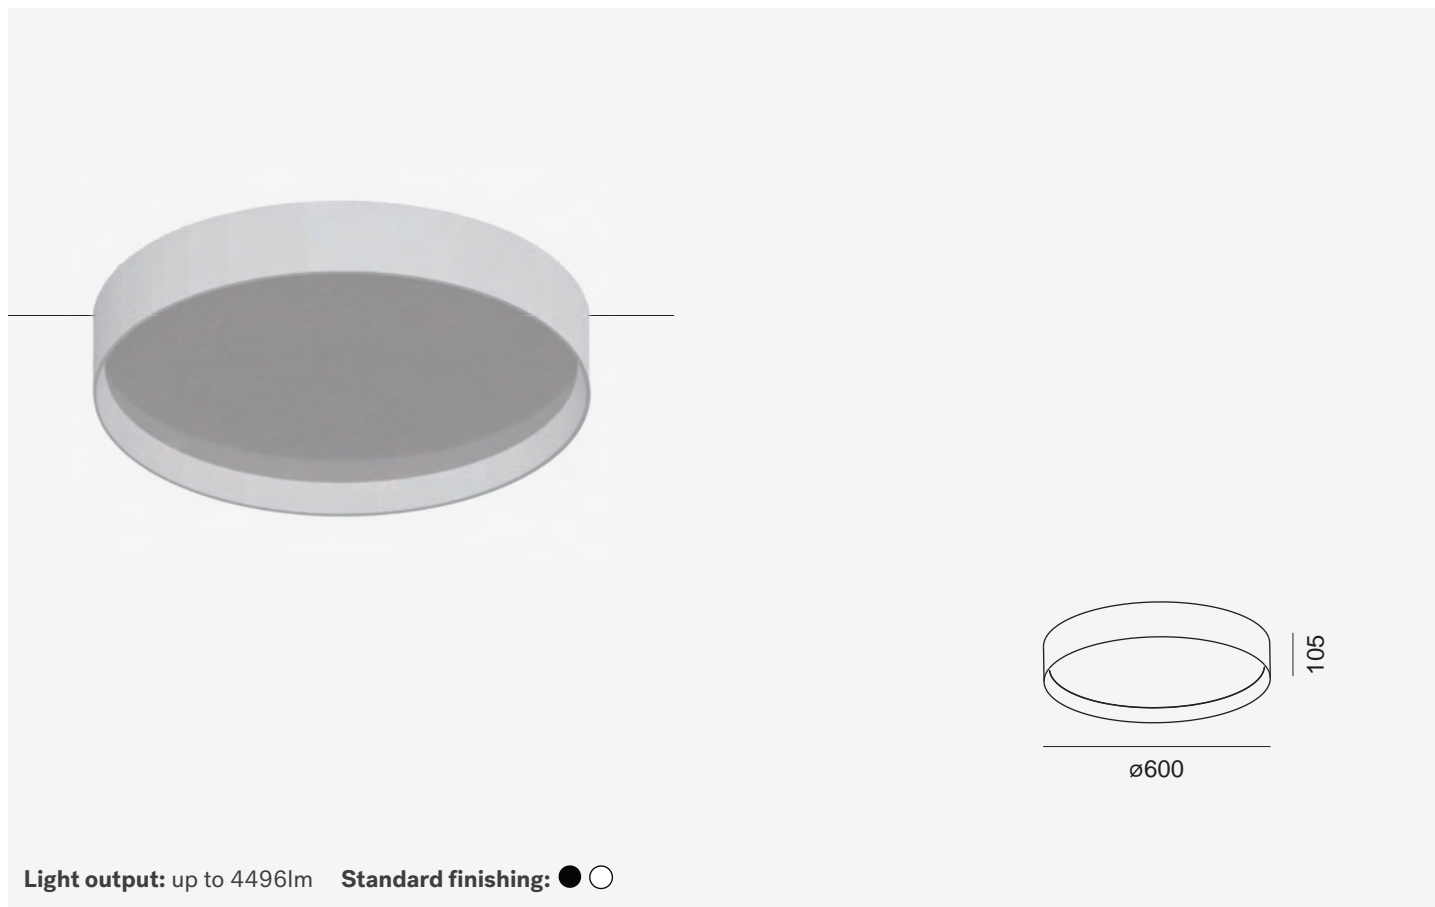

## Features

Introducing our SUN 3, featuring a lumen output of 3747lm to 4496lm. Available in standard color temperatures of 3000K, 4000K, and 5000K, with additional options on request. This adaptable product offers a 90° beam angle, making it ideal for inviting living areas. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

## Dimming options

For dimmable version add the following suffix to the Part number → -1V: 1-10V, -DA: DALI, -PU: Push, -TR: Triac.

## Applications

SUN are bigger and powerful versions of our surface-mounted ceiling lighting, offering expansive, diffuse illumination that enhance any space. Ideal for both large and small areas, they provide efficient lighting while enriching the ambiance. Whether lighting expansive retail spaces, open-concept cafés, or large bars, SUN create warm, inviting atmospheres. Their versatility makes it perfect for larger professional settings like offices, hotels, and conference rooms, as well as spacious private residences, combining style and functionality.



SUN 3 - 38W	Optics	Output	CCT	Part number
	90°	3747lm	3000K	F026.38W090□930
		4047lm	4000K	F026.38W090□940
		4496lm	5000K	F026.38W090□950
<div>□ refers to finishing: B: Black, W: White. Other CCT upon request.</div>				