
## SUN-P2

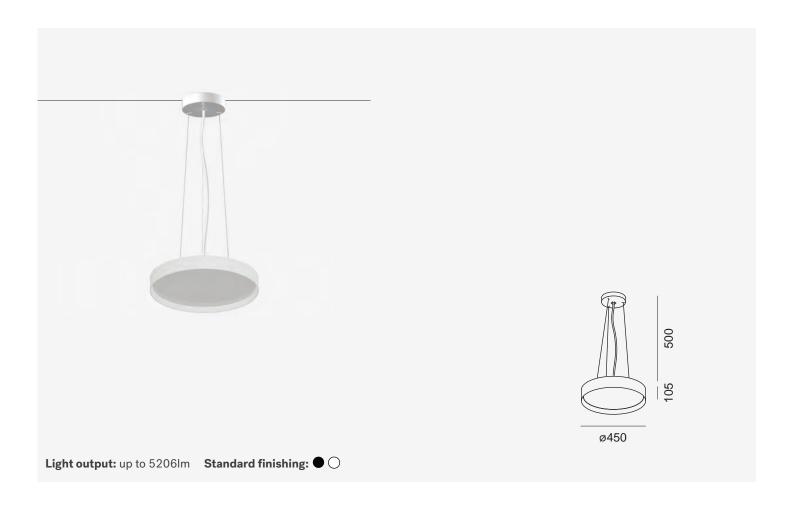

## **Features**

Presenting our SUN-P 2, featuring a lumen output of 4339lm to 5206lm. Available in standard color temperatures of 3000K, 4000K, and 5000K, with additional options on request. This product offers a 90° down and 120°up beam of light, making it ideal for inviting living areas. With an IP20 rating, it provides suitable protection for indoor environments. Additionally, we provide customized finishing options to meet the project specific requirements.

## **Dimming options**

For dimmable version add the following suffix to the Part number  $\rightarrow$  -1V: 1-10V, -DA: DALI, -PU: Push, -TR: Triac.

## **Applications**

SUN-P pendant fixtures are powerful lighting solutions designed for large spaces, offering expansive, diffuse illumination that enhances both commercial and residential environments. Ideal for high-ceiling areas, they provide efficient lighting while adding warmth and elegance. Whether illuminating spacious retail areas, open-concept lofts, grand dining rooms, or expansive living spaces, SUN-P pendants create welcoming atmospheres. Their ability to produce direct and indirect light ensures each space is beautifully lit and infused with warmth and sophistication. Perfect for modern interiors, they transform ordinary spaces into extraordinary ones.

























www.elinca.it Downlights

SUN-P 2 - 41W	Optics	Output	ССТ	Part number
	Up: 120° Down: 90°	1775lm 2564lm	3000K 3000K	N004.041WDFF□930
	Up: 120° Down:90°	1917lm 2769lm	4000K 4000K	N004.041WDFF□940
	Up: 120° Down:90°	2130lm 3076lm	5000K 5000K	N004.041WDFF□950
☐ refers to finishing: B: Black, W: White. Standard configuration: 1.5m steel wire set. Other CCT upon request.				

Accessories	Description	Part number
	3m steel wire set 5m steel wire set	ACC01166 ACC01167