



# WAP 1220 RGBW(2700K) PIXEL Side bending

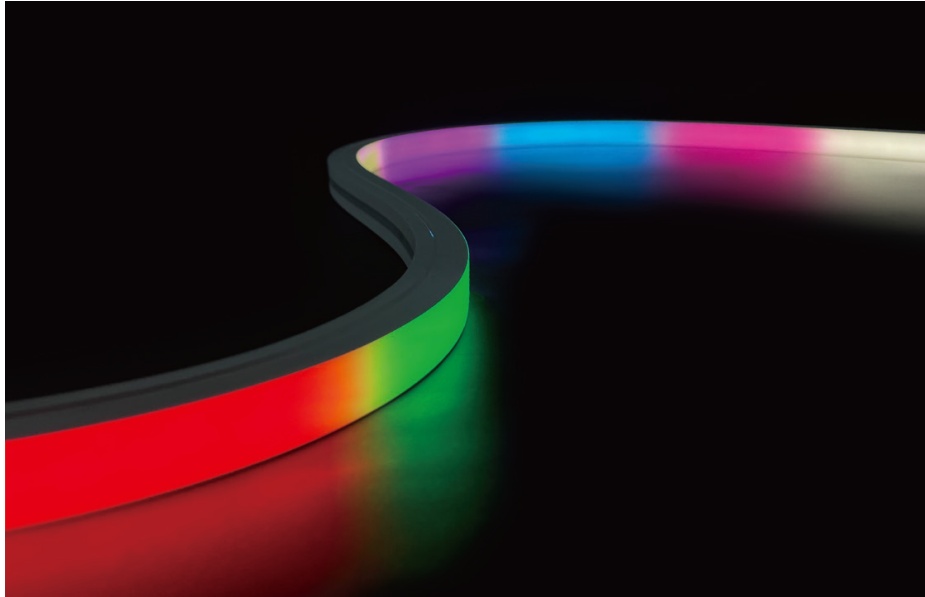

High quality silicone extrusion  
Fully waterproof  
Available in 5m reel  
Cutttable on site  
300 mm feeding wires

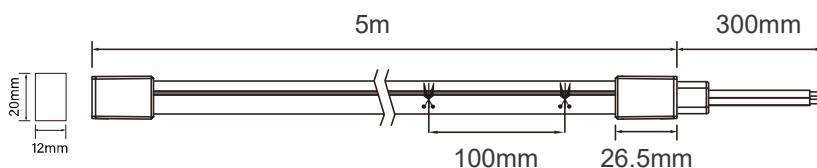

## WAP 14W 1220PX IP67 . RGBW

Model Power Dimensions IP grade CCT

**Model**  
WAP PIXEL

**CCT**  
RGBW RGBW(2700K)

**Power**  
14.4W [W/m]

**Dimensions**  
12x20mm

**IP grade**  
IP67

### Accessories

Front feeding (30cm cable)  
Side feeding (30cm cable)  
Bottom feeding (30cm cable)  
End cap  
Stainless steel clip  
Aluminium mounting profile L=1m

### Features

|                        |             |
|------------------------|-------------|
| LED type               | Mid-Power   |
| LED nr.                | 120LEDs/m   |
| Standard CCT           | RGBW(2700K) |
| Other CCT upon request | -           |
| Beam angle             | 120°        |

### Performance

|                        |                  |
|------------------------|------------------|
| Lumen output (at 85°C) | 188lm/m          |
| Color rendering index  | >90 (white only) |
| Efficacy               | 13lm/W (average) |

### Electrical and control

|                        |                 |
|------------------------|-----------------|
| Supply type            | Costant voltage |
| Input voltage          | DC24V           |
| Input current          | 0.60A/m         |
| Max. power consumption | 14.4W/m         |
| Pixel control          | External - DMX  |

### Physical

|                       |           |
|-----------------------|-----------|
| Minimum cut           | 125mm     |
| Reel length           | 5m        |
| Weight                | 0.30kg/m  |
| Operating temperature | -25/+55°C |
| ESD Protection        | +/- 2000V |

