



WAP 1615 RGBW(2700K) PIXEL Top bending

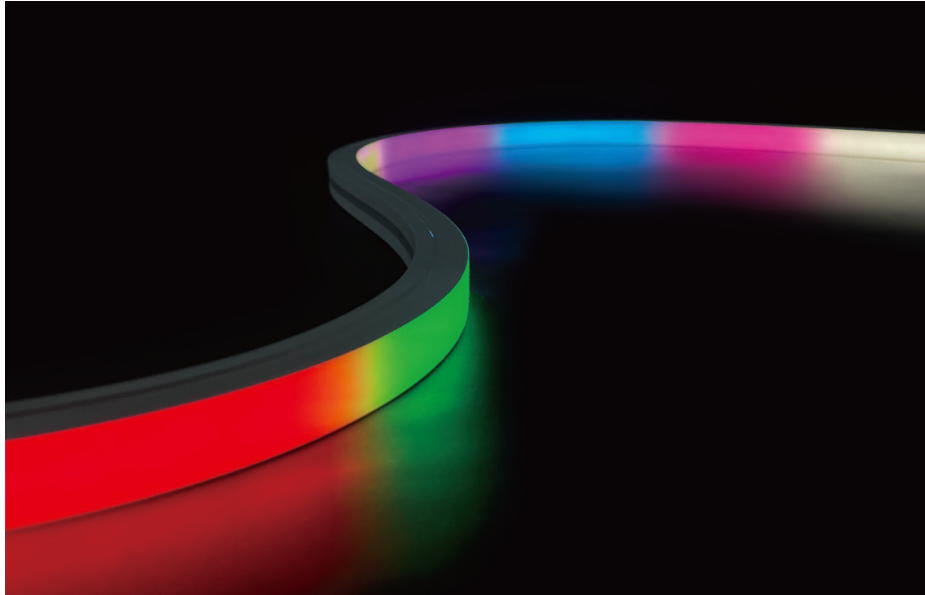

High quality silicone extrusion
Fully waterproof
Available in 5m reel
Cutttable on site
300 mm feeding wires

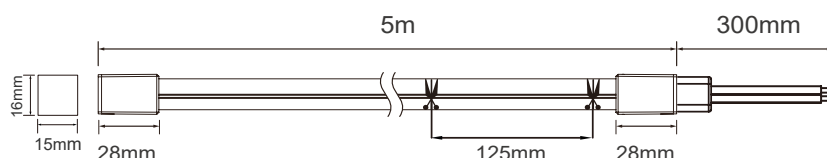

WAP 14W 1615PX IP67 . RGBW

Model Power Dimensions IP grade CCT

Model
WAP PIXEL

CCT
RGBW RGBW(2700K)

Power
14.4W [W/m]

Dimensions
16x15mm

IP grade
IP67

Accessories

Front feeding (30cm cable)
Side feeding (30cm cable)
Bottom feeding (30cm cable)
End cap
Stainless steel clip
Aluminium mounting profile L=1m

Features

LED type	Mid-Power
LED nr.	120LEDs/m
Standard CCT	RGBW(2700K)
Other CCT upon request	-
Beam angle	120°

Performance

Lumen output (at 85°C)	320lm/m
Color rendering index	>90 (white only)
Efficacy	22lm/W (average)

Electrical and control

Supply type	Costant voltage
Input voltage	DC24V
Input current	0.60A/m
Max. power consumption	14.4W/m
Pixel control	External - DMX

Physical

Minimum cut	125mm
Reel length	5m
Weight	0.30kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V

