

WAVE-PU

Drive over
Stainless steel body
Custom curved fixture can be made



Features

LED type	Mid-power
Color and CCT	RGBW
Other colors	-
Beam angle	Diffuse

Performance

Max. delivered output	490lm/m
Efficacy	34lm/W

Electrical and control


Supply type	Low voltage
Input voltage	DC24V
Max. power consumption	14.4W/m
Control	External DALI

Physical

Light fixture dimension	20x20mm
Formwork dimension	24xH105mm
Housing material	Stainless steel
Screen material	Extra hard PU
Weight	1,8kg/m
Operating temperature	-25/+55°C

Accessories

Stainless steel framework

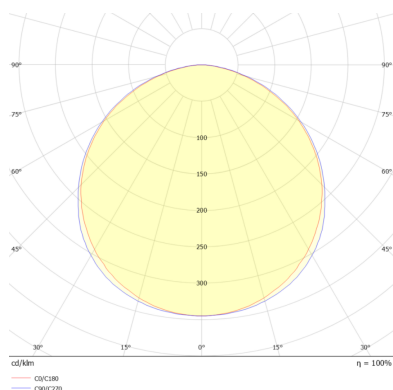

DC 24V		CRI >90	SDCM <3	LM80	IK10	IP68
-----------	--	------------	------------	------	------	------